

ADMINISTRATIVE MANUAL
COUNTY OF LOS ANGELES
DEPARTMENT OF PUBLIC WORKS
GEOTECHNICAL AND MATERIALS ENGINEERING DIVISION

GS200.1
06/30/14

GUIDELINES FOR DESIGN, INVESTIGATION, AND REPORTING
LOW IMPACT DEVELOPMENT STORMWATER INFILTRATION

Urbanization impacts the water resources of Los Angeles County by decreasing the amount of stormwater that infiltrates into the subsurface, and by increasing the potential for conveyance of pollutants into watersheds and the flood control system. Low Impact Development (LID) stormwater infiltration is a strategy that is used to mitigate some of these hydrological impacts. The goal of LID stormwater infiltration is to reduce runoff from the site using stormwater quality control measures that retain runoff. The objective of these guidelines is to facilitate stormwater infiltration in areas of Los Angeles County where the ground conditions are suitable.

Compliance with the Los Angeles County LID Ordinance (Title 12, Section 12.84) is required before the issuance of a building or grading permit. The Department of Public Works prepared an updated *LID Standards Manual* in February, 2014 to compile previous documents, update standards, and assist applicants with the development process. The *LID Standards Manual* is available online at:

<http://dpw.lacounty.gov/idd/lib/fp/Hydrology/Low%20Impact%20Development%20Standards%20Manual.pdf>

The geotechnical guidelines presented herein have been incorporated into the *LID Standards Manual* in "Section 4: Site Assessment and Design Considerations" and on the Fact Sheets in Appendix E. They provide technical guidance and specific requirements for geotechnical investigations that evaluate ground conditions for proposed stormwater infiltration sites. All proposed stormwater quality control measure Best Management Practices (BMPs) with an infiltration component require a geotechnical report. These LID stormwater quality control measures include but are not limited to:

- Bioretention
- Infiltration Trench
- Permeable Pavement
- Infiltration Basin
- Dry Well

Geotechnical reports prepared for LID stormwater quality control measure infiltration BMPs must address the Site Requirements discussed in these guidelines. Data and analyses must be provided to substantiate the recommended infiltration rates and groundwater elevations. Geotechnical issues that must be addressed include pollutant and sewage mobilization, slope stability, static and seismic settlement, surcharge on adjacent structures, expansive soil and rock, potential impacts to offsite property, and any other geotechnical hazards.

SITE REQUIREMENTS FOR STORMWATER INFILTRATION

1. Subsurface materials shall have a corrected infiltration rate equal to or greater than 0.3 inches per hour (in/hr). Procedures for performing in-situ infiltration tests and application of correction factors are described later in these guidelines.
2. The invert of stormwater infiltration shall be at least 10 feet above the groundwater elevation. Procedures for determining the groundwater elevation are described later in these guidelines.
3. Stormwater infiltration is not allowed in areas that pose a risk of causing pollutant mobilization. Areas with known groundwater contamination include sites listed on the State Water Resources Control Board's "GeoTracker" website.
4. Stormwater infiltration is not allowed in areas that pose a risk of causing sewage effluent mobilization from septic pits, seepage lines, or other sewage disposal.
5. Stormwater infiltration BMPs shall not be placed on steep slopes and shall not create the condition or potential for slope instability.
6. Stormwater infiltration shall not increase the potential for static or seismic settlement of structures on or adjacent to the site. Potential geotechnical hazards that shall be addressed include collapsible soils and liquefaction.
7. Stormwater infiltration shall not place an increased surcharge on structures or foundations on or adjacent to the site. The pore-water pressure shall not be increased on soil retaining structures on or adjacent to the site.
8. The invert of stormwater infiltration shall be set back at least 15 feet, and outside a 1:1 plane drawn up from the bottom of adjacent foundations.
9. Stormwater infiltration shall not be located near utility lines where the introduction of stormwater could cause damage to utilities or settlement of trench backfill.
10. Stormwater infiltration is not allowed within 100 feet of any groundwater production wells used for drinking water.

GEOTECHNICAL INVESTIGATION

A site-specific geotechnical investigation performed for proposed stormwater infiltration quality control measures shall include subsurface exploration, laboratory testing, soil type classification, groundwater investigation, and in-situ infiltration testing. The investigation must be conducted by or under direct supervision of a State of California licensed engineering geologist, geotechnical engineer, or civil engineer experienced in the field of soil mechanics.

Subsurface Exploration

Subsurface exploration shall be performed to characterize the subsurface soil or rock through which water will infiltrate. Explorations shall be performed to a depth of at least 10 feet below the proposed invert of infiltration. Explorations should be performed at each proposed infiltration BMP location. For continuous infiltration improvements, enough exploration shall be performed to sufficiently characterize the soil or rock.

Laboratory Testing

Laboratory testing shall be performed to characterize the subsurface soil or rock through which water will infiltrate and confirm visual classifications made in the field. Tests shall be performed on samples collected at and below the proposed invert of stormwater infiltration. Sieve analysis, hydrometer, plasticity index, density, and moisture content tests are the best indicators of infiltration potential. Classifications must be made according to the two systems discussed below. A discussion should be provided on how the soil porosity and moisture content will affect the proposed stormwater quality control measure BMP.

Soil Type Classification

Soil types are one of the best indicators to determine whether or not a proposed site will be suitable for infiltration. Classifications of subsurface soils at and below the proposed invert of infiltration shall be made in accordance with the following systems:

1. Unified Soil Classification System (USCS). The USCS is defined by the American Society for Testing and Materials (ASTM) International Standard D2487.
2. Hydrologic Soil Group (HSG). The HSG specifically classifies soils with regard to infiltration potential. The United States Department of Agriculture Natural Resources Conservation Service, National Engineering Handbook, Chapter 7 Hydrologic Soil Groups, is available online at:

<http://directives.sc.egov.usda.gov/OpenNonWebContent.aspx?content=17757.wba>

Coefficient of Permeability

For practitioner applications, the coefficient of permeability is a soil index property that is understood to be closely related to the infiltration potential of soils. The figure below presents typical coefficients of permeability for different soil type classifications. It is provided as a general reference. As shown, the minimum corrected infiltration rate requirement is 0.3 in/hr.

Coefficient of Permeability k (m/s)											
	10^0	10^{-1}	10^{-2}	10^{-3}	10^{-4}	10^{-5}	10^{-6}	10^{-7}	10^{-8}	10^{-9}	10^{-10}
Drainage	Good					Poor			Practically Impervious		
Soil types	Clean gravel	Clean sands, clean sand and gravel mixtures				Very fine sands, organic and inorganic silts, mixtures of sand silt and clay, glacial till, stratified clay deposits, etc.			"Impervious" soils, e.g., homogeneous clays below zone of weathering		
					"Impervious" soils modified by effects of vegetation and weathering						

Permeability and Drainage Characteristics of Soils from Terzaghi and Peck

Groundwater Investigation

For sites where the historic high groundwater is greater than 10 feet below the proposed invert of stormwater infiltration, the historic high groundwater elevation may be used. Historic high groundwater elevations may be obtained from the Seismic Hazard Evaluation Open-File Reports prepared by the California Geological Survey at the following link: <http://www.consrv.ca.gov/cgs/shzp/pages/index.aspx>.

For sites where the historic high groundwater is within 10 feet of the proposed invert of infiltration, but existing well data in the vicinity of the proposed site shows an elevation greater than 10 feet below the invert of infiltration, existing well data may be used. Monitoring wells operated by the Department of Public Works Water Resources Division may be accessed online at the following link: <http://dpw.lacounty.gov/wrd/wellinfo/>.

For sites where the historic high groundwater and existing well data are within 10 feet of the proposed invert of infiltration, a site-specific groundwater investigation must be performed to justify using a deeper groundwater elevation. At least two borings must be drilled to depths at least 10 feet greater than the proposed invert of infiltration. The borings must be monitored for a period of at least 24 hours.

IN-SITU INFILTRATION TESTING

Infiltration tests must be performed to determine a corrected infiltration rate for design of the proposed stormwater infiltration quality control measures. An infiltration test shall be performed at each location and elevation where a stormwater infiltration BMP is proposed. Due to site variability and potential uncertainty in the testing procedures, it is recommended that multiple tests be performed for each BMP and a representative corrected infiltration rate be selected for design.

Six acceptable testing procedures and the corresponding correction factors that must be applied for design are discussed below. In general, the double-ring infiltrometer and well permeameter tests are preferred because their procedures are standardized and well-documented. All of the procedures have significant soaking and data collection periods in an attempt to model the behavior of the stormwater quality control measure during a design storm event.

Double-Ring Infiltrometer Test

A double-ring infiltrometer consists of two concentric metal rings. The rings are driven into the ground to preclude leakage, and then filled with water. Water in the outer ring keeps the flow in the inner ring vertical and the drop in water level in the inner ring is used to establish the vertical infiltration rate. This testing procedure is useful for LID features that are proposed close to the ground surface, or can be performed at depth in a trench excavation. Procedures and example data forms for double-ring infiltrometer testing are provided in ASTM D3385. See photo below for example test setup. Field log template with example are attached on Plates 1-A, 1-B, and 1-C.




Double Ring Infiltrometer (ASTM D3385) Test Setup

Well Permeameter Test

The well permeameter procedure consists of introducing water into the subsurface through a slotted PVC pipe inserted into a borehole. This testing procedure is useful for LID features that are proposed at depth, since slotted sections of PVC pipe can be placed at any depth in the borehole. Careful attention must be paid to isolate the depth of the test section with an impermeable cap above and below it. The annulus between the slotted PVC and native materials in the test section depths must be backfilled with well-draining sand. The borehole below the desired test section depths, and the annulus between solid PVC and native materials above the desired test section, must be backfilled with bentonite or other low-permeability material. The borehole itself cannot create a path of less resistance for the water than the in-situ materials that are being tested.

Details for this test can be found in the Procedure for Performing Field Permeability Testing by the Well Permeameter Method (USBR 7300-89) attached in Appendix A. See photo below for example test setup. Field log template with example are attached on Plates 2-A, 2-B, and 2-C.

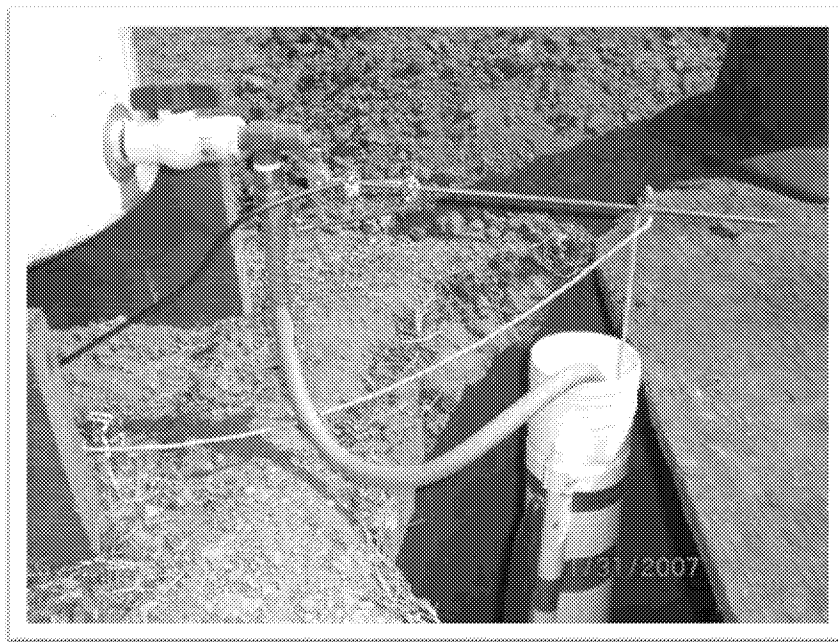

Well Permeameter (USBR 7300-89) Test Setup

Boring Percolation Test Procedure

This procedure is similar to the USBR 7300-89 Well Permeameter Testing Procedure and is useful for LID features that are proposed at depth, since the depth of testing can be isolated with slotted sections of PVC pipe, surrounded by a bentonite cap, and placed at any depth in the borehole. It requires the application of a reduction factor to account for non-vertical flow. A figure is attached on Plate 3-A. Field log template with example are attached on Plates 3-C and 3-D.

1. Using a hollow-stem auger, advance the boring at least 12 inches below the elevation of proposed invert of infiltration. Rotate the auger until all cuttings are removed. Care shall be taken to ensure smearing of clayey soils does not occur along augered surface as this will dramatically reduce the final calculated infiltration rate. Record the boring diameter and depth to be tested.
2. Install through the auger, a 2- to 4-inch-diameter perforated PVC casing with a solid end cap. Perforations shall be 0.02 inch slot or larger. Pour filter pack down inside of auger while withdrawing the auger such that the PVC casing is surrounded by the filter pack. The filter pack and perforated casing must have a larger hydraulic conductivity than the soil or rock that is to be tested.
3. For boreholes drilled below the proposed invert of infiltration that are being converted to boring percolation tests, careful attention must be paid to isolate the depth of the test section with an impermeable cap above and below it. The annulus between the slotted PVC and native materials in the test section must be backfilled with well-draining sand. The borehole below the desired test section, and the annulus between solid PVC and native materials above the desired test section, must be backfilled with bentonite or similar low-permeability material. The borehole itself shall not create a path of less resistance for the water than the in-situ materials being tested.
4. Presoak the hole immediately prior to the percolation testing. Presoaking the test hole shall maintain a water level above the percolation testing level and at least 12 inches above the bottom of the boring. If the water seeps completely away within 30 minutes after filling the boring two consecutive times, and the subsurface exploration has yielded permeable soils beneath the proposed invert of infiltration, presoaking can be considered complete and the testing can proceed. If the water does not completely drain within 30 minutes, presoak the hole for at least 4 hours before conducting the infiltration test. A sounder or piezometer may be used to determine the water level. Record all water levels to the nearest $\frac{1}{8}$ -inch increment.

5. After presoaking, determine the time interval that will be used to measure the water drop readings for the percolation test. Fill the hole to a minimum depth of 12 inches above the top of the bentonite plug. Observe the drop in the water during the next 30 minutes and compare with the condition that applies below. This will determine the standard time interval for this test location:
 - a. If no water remains in the hole, the time interval between readings shall be 10 minutes.
 - b. If water remains in the hole, the time interval between readings shall be 30 minutes.
6. Once the time interval for the test has been determined, add water to the casing to the depth of soil to be tested. The water depth must be less than or equal to the water level used to presoak the hole and a minimum depth of 12 inches above the bentonite plug. For each successive percolation test reading, the starting water level must be at this initial water depth.
7. Conduct the percolation test by taking readings of the water drop from the initial water depth. Record the time and the drop in water level during the standard time interval determined in Step 5. Fill the boring back to the initial water depth.
8. Repeat the percolation test readings a minimum of eight times or until a stabilized rate of drop is obtained, whichever occurs first. A stabilized rate is when the highest and lowest readings are within 10 percent of each other from three consecutive readings.
9. The average drop of the stabilized rate over the last three consecutive readings is the preadjusted percolation rate at the test location, expressed in inches per hour. The preadjusted percolation rate must be reduced to account for the discharge of water from both the sides and bottom of the boring (i.e., non-vertical flow). Use the following formula to determine the infiltration rate:

$$\text{Reduction Factor (R}_f\text{)} = R_f = \left(\frac{2d_1 - \Delta d}{DIA} \right) + 1$$

With:

d_1 = Initial Water Depth (in.)

Δd = **Water Level Drop of the Final Period or Stabilized Rate (in.)**

DIA = Diameter of the boring (in.)

Excavation Percolation Test Procedure

Similar to the double-ring infiltrometer, this testing procedure is useful for LID features that are proposed to be constructed close to the ground surface, or can be performed at depth in a trench excavation. It requires the application of a reduction factor to account for nonvertical flow. A figure is attached on Plate 3-B. Field log template with example are attached on Plates 3-C and 3-D.

1. Excavate a 1 cubic foot hole (1 foot deep x 1 foot wide x 1 foot long) at the elevation of the proposed invert of infiltration. Insert a wire-cage to support the walls. The actual excavation depth may be deeper than 12 inches; however, during the test the water shall be limited to 12 inches in depth.
2. Presoak the hole by filling it with water immediately prior to the percolation testing. If the water seeps completely away within 30 minutes after filling the excavation two consecutive times, and the subsurface exploration and has yielded permeable soils beneath the proposed invert of infiltration, presoaking can be considered complete and the testing can proceed. If the water does not completely drain within 30 minutes, presoak the excavation maintaining 12 inches of water for at least 4 hours before conducting the infiltration testing. Record all water levels to the nearest $\frac{1}{8}$ -inch increment.
3. After presoaking, determine the time interval for recording the water drop between readings. Fill the excavation 12 inches above the bottom. Observe the drop in the water during the next 30 minutes and compare with the condition that applies below. This will determine the standard time interval for this test location.
 - a. If no water remains in the hole, the time interval between readings shall be 10 minutes.
 - b. If water remains in the hole, the time interval between readings shall be 30 minutes.
4. Once the time interval for the test has been determined, add water to 12 inches above the bottom of the excavation. For each successive percolation test reading, the starting water level must be at this initial water depth.
5. Conduct the percolation test by taking readings of the water drop from the initial water depth. Record the time and record the drop in water level during the time interval determined in Step 3. Fill the excavation back to the initial water depth.
6. Repeat the percolation test readings a minimum of eight times or until a stabilized rate of drop is obtained, whichever occurs first. A stabilized rate is when the highest and lowest readings are within 10 percent of each other for three consecutive tests.

7. The average drop of the stabilized rate over the last three consecutive readings is the preadjusted percolation rate at the test location, expressed in inches per hour. The preadjusted percolation rate must be reduced to account for the discharge of water from both the sides and bottom of the boring (i.e., non-vertical flow). Use the following formula to determine the infiltration rate:

$$\text{Reduction Factor (R}_f\text{)} = R_p = \left(\frac{2d_1 - \Delta d}{13.5} \right) + 1$$

d_1 = Initial Water Depth (in.)

Δd = Water Level Drop of Final Period or Stabilized Rate (in.)

DIA = 13.5 (Equivalent Diameter of the boring) (in.)

High Flowrate Percolation Test Procedures

If the water is draining faster than an infiltration rate of 14 inches per hour during any of the previous testing procedures, a modified test must be performed to record the infiltration rate. This test is conducted in the following manner:

1. Determine the surface area (sides and bottom) through which the water is infiltrating.
2. Flood that area in a suitable manner where the rate of water discharging into the test pit can be measured.
3. Calculate the infiltration rate by dividing the rate of discharge (i.e., cubic inches per hour) by the infiltration surface area (i.e., square inches).

Policy for New Percolation Basin Testing, Design and Maintenance

The County implemented the Policy for New Percolation Basin Testing, Design and Maintenance on October 10, 2007 for private development projects. The policy was implemented due to an increase in development and a lack of drainage features in certain areas of Los Angeles County. The hydrologic criteria and water quality portions of the policy have been superseded by the 2014 LID Standards Manual; however, the testing procedure is still applicable for infiltration basins proposed as part of large private development projects. The testing procedure is outlined in Attachment 1 of the document attached to this policy as Appendix B.

CORRECTION FACTORS

Measured infiltration rates must be reduced with correction factors to determine design values that will represent long-term performance of the proposed infiltration BMPs. Test-specific correction factors are applied to account for the direction of flow during the test and calculations. The correction factor for site variability, number of tests performed, and thoroughness of subsurface investigation should be selected by comparing the size and scope of subsurface exploration to similar projects. The correction factor for siltation, plugging, and maintenance should be selected based on the specified levels of pre-treatment and maintenance for the proposed BMPs. For example, stormwater infiltration BMPs that are proposed with pretreatment components and regular maintenance programs, a correction factor of 1 may be appropriate; for BMPs that are proposed to infiltrate untreated flow with unspecified maintenance programs, a high level of siltation and plugging is to be expected and a correction factor of 3 is likely more appropriate.

The following table provides guidance for the range of values used for each factor. The geotechnical consultant shall determine site-specific correction factors and provide substantiating data and analyses to justify the selection. All correction factors will be subject to review and approval by the County.

Correction Factors Applied to Measured Infiltration Rates	
Double-ring infiltrometer	$CF_t = 1$
Well permeameter	$= 1$
Boring percolation	See test procedures $= R_f$
Excavation percolation	See test procedures $= R_f$
High flow-rate percolation	$= 2$
Policy for new percolation basins	$= 2$
Site variability, number of tests, and thoroughness of subsurface investigation	$CF_v = 1 \text{ to } 3$
Long-term siltation, plugging and maintenance	$CF_s = 1 \text{ to } 3$

Total Correction Factor, $CF = CF_t \times CF_v \times CF_s$

Design Infiltration Rate = Measured Percolation Rate/ CF

REPORTING

The geotechnical report shall provide an evaluation of the specific stormwater quality control measures that are proposed, and their suitability for use at the specified project location based on the subsurface conditions. The report shall address any potential geotechnical hazards. The report shall contain a description of the subsurface conditions with logs of subsurface exploration, results of laboratory testing, soil classifications, depth to groundwater, and in-situ infiltration test results. There shall be a discussion on the infiltration test procedure that was performed including field data sheets, test results, and correction factors. The compilation of data must provide a reasonable understanding of the subsurface conditions and the ability to infiltrate at the proposed location and depth. The report must be signed and stamped by a State of California licensed engineering geologist, geotechnical engineer, or civil engineer experienced in the field of soil mechanics.

At a minimum, the following must be discussed in all infiltration reports submitted for County regulatory compliance:


- Existing and Proposed Site Conditions
- Potential Geotechnical Hazards
- Logs of Subsurface Exploration
- Geotechnical Map with Subsurface Exploration Locations
- Results of Laboratory Testing
- Soil Classifications (USCS and HSG)
- Groundwater Elevation
- Measured Infiltration Rate
- Correction Factors and Design Infiltration Rate
- Proposed Stormwater Quality Control Measure Locations and Invert Depths

The report shall specify the recommended invert depth of the proposed stormwater quality control measure. The invert depths shall be noted on the geotechnical map for each location of proposed LID feature. Infiltration tests must be conducted when the final grades of the subject site have been established. Guidance should be provided to the developer such that no on-site grading or construction will disturb soils at or below this specified invert depth of stormwater infiltration. If operation and maintenance of the proposed LID feature is critical to maintaining the design infiltration rate, the geotechnical consultant shall discuss the best practices to maintain the structure and provide suggestions for design use and life. All recommendations from the geotechnical consultant must be incorporated into the design or shown as notes on the plans.

DISCUSSION

Infiltration and permeability values are understood to have a very large range by orders of magnitude for different soil types. There is also substantial uncertainty that is associated with even the most rigorous testing procedures. For these reasons, it is important that the recommended design infiltration rate fall in the general order of magnitude for the soil type classifications at the site. If there is discrepancy between the presented data and the recommended infiltration rates, the consultant shall revisit soil descriptions, soil data, infiltration testing procedure and analyses. A substantiated explanation must be provided for any variance. Additional testing and discussion may be necessary to verify the infiltration rates prior to acceptance by the County.

Approved by:

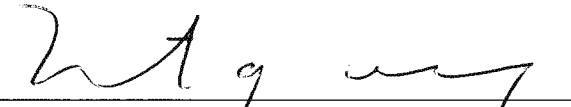

Michael A. Montgomery
Supervising Engineering Geologist IV



Greg Kelley
Assistant Deputy Director

RESOURCE DOCUMENTS

1. American Standard Test Method (ASTM) Standard, Designation D 3385, *Standard Test Method for Infiltration Rate of Soils in Field Using Double-Ring Infiltrometer* (latest edition). <http://www.astm.org/Standards/D3385.htm>
2. California Department of Conservation, *Seismic Hazard Zone Reports*, Division of Mines and Geology, Los Angeles County, 1998. <http://www.consrv.ca.gov/cgs/shzp/pages/index.aspx>
3. California Regional Water Quality Control Board Los Angeles Region, *Waste Discharge Requirements for Municipal Separate Storm Sewer System (MS4)*, NPDES Permit No. CAS004001, Order No. R4-2012-0175, November 8, 2012. http://www.waterboards.ca.gov/rwqcb4/water_issues/programs/stormwater/municipal/
4. County of Los Angeles, Code of Ordinances, Title 12, Chapter 12.84, *Low Impact Development Standards*. https://library.municode.com/html/16274/level2/Tit12EnPr_Ch12.84loimdest.html
5. County of Los Angeles, Department of Public Health, *A professional Guide to Requirements and Procedures for Onsite Wastewater Treatment Systems (OWTS)*, 2013. http://www.publichealth.lacounty.gov/eh/EP/lu/lu_owts.htm
6. County of Los Angeles, Department of Public Works, *Low Impact Development Standards Manual*, February 2014. http://dpw.lacounty.gov/ldd/lib/fp/Hydrology/Low_Impact_Development_Standards_Manual.pdf
7. State of California, Department of Transportation, Division of Engineering Services, *Soil and Rock Logging, Classification, Presentation Manual*, 2010. http://www.dot.ca.gov/hq/esc/geotech/sr_logging_manual/srl_manual.html
8. Terzaghi, K., Peck, Ralph B., and Mesri, G., *Soil Mechanics in Engineering Practice*, Third Edition, 1996.
9. United States Department of the Interior, Bureau of Reclamation (USBR), *Procedure for Performing Field Permeability Testing by the Well Permeameter Method*, USBR 7300-89. http://www.usbr.gov/pmts/wquality_land/DrainMan.pdf
10. United States Department of Agriculture, *Chapter 7: Hydrologic Soil Groups*, Natural Resources Conservation Service National Engineering Handbook, <http://directives.sc.egov.usda.gov/OpenNonWebContent.aspx?content=17757.wba>

[illegible]

DOUBLE-RING INFILTROMETER TEST
(use ASTM D 3385)

Project: Practice Infiltration Testing

Test Location: 123 Drive Road, Alhambra, CA

Water Source: Potable Water pH: 7.5

Tested By: BDS, YH, & WM

Depth to water table: 17 ft

Constants


	Area (in ²)	Depth of water (in)	No.	Water Containers Volume/ΔH (in ² /in)
Inner Ring	109.59	1.57	1	4.8
Annular Space	326.43	1.61	2	10.78

Water level maintained using: ☐ Flow valve ☐ Float valve ☒ Mariotte tube

Penetration of rings: Inner: 3.0 in Outer: 6.9 in

Trial No.		Date 1982	Time (24hr format) hh:mm	Elapsed Time Δ/(total), min	Flow Readings				Water Temp. °F	Incremental Infiltration		Remarks: weather conditions, etc.
					Inner Ring		Annular Space			Inner in/hr	Annular in/hr	
					Reading in	Flow in ³	Reading in	Flow in ³				
1	S	10/14	10:00	15	1.18	6.96	0.87	23.74	59	0.25	0.29	Cloudy, slight wind
	E	" "	10:15	(15)	1.75		1.73	59				
2	S	" "	10:15	15	1.75	12.94	1.73	48.51	59	0.47	0.59	
	E	" "	10:30	(30)	2.81		3.5	59				
3	S	" "	10:30	15	2.81	16.05	3.5	51.75	59	0.59	0.63	
	E	" "	10:45	(45)	4.13		5.39	59				
4	S	" "	10:45	15	4.13	18.67	5.39	57.67	59	0.68	0.71	
	E	" "	11:00	(60)	5.67		7.5	60				
5	S	" "	11:00	30	5.67	46.26	7.5	141.82	60	0.84	0.87	
	E	" "	11:30	(90)	9.47		12.68	61				
6	S	" "	11:30	30	9.47	51.75	12.68	157.44	61	0.95	0.96	Refilled tubes
	E	" "	12:00	(120)	13.72		18.43	62				
7	S	" "	12:10	60	1.38	118.63	0.87	360.16	62	1.08	1.1	" "
	E	" "	13:10	(180)	11.12		14.02	63				
8	S	" "	13:20	60	0.94	114.54	1.26	347.22	64	1.04	1.06	" "
	E	" "	14:20	(240)	10.35		13.94	64				
9	S	" "	14:30	60	1.69	103.5	1.85	308.41	64	0.95	0.94	" "
	E	" "	15:30	(300)	10.2		13.11	64				
10	S	" "	15:40	60	0.87	96.78	1.77	295.48	64	0.88	0.9	" "
	E	" "	16:40	(360)	8.82		12.56	64	Cloudy, slight wind			

Graphical Representation of Data from Example

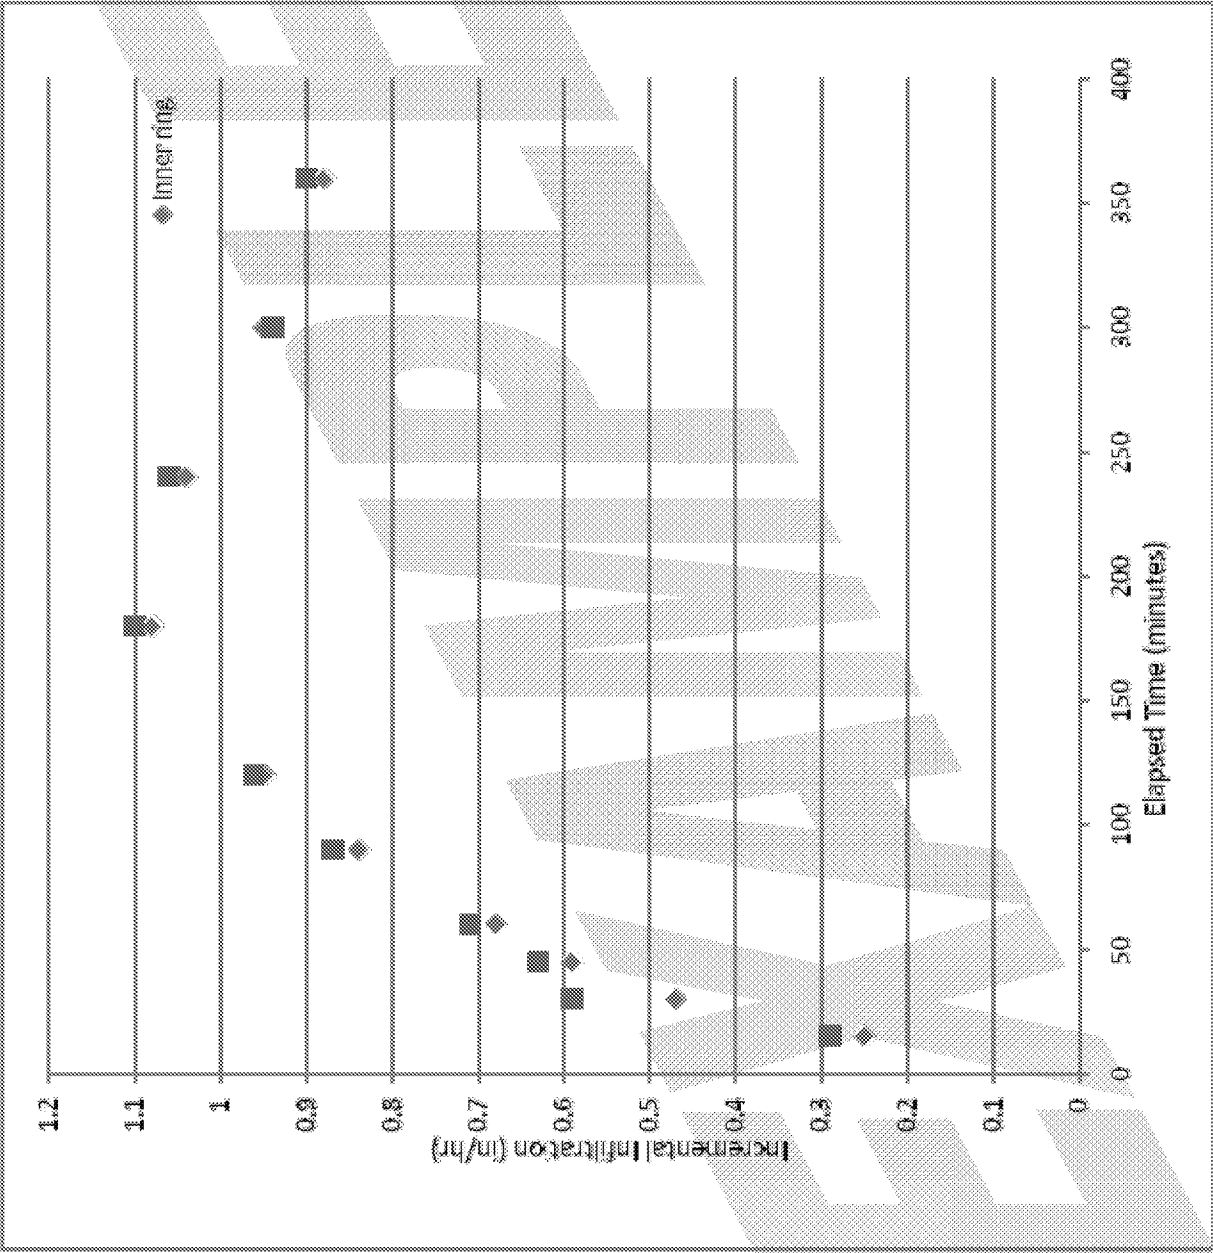

WELL PERMEAMETER TEST
(reference USBR 7300-89)

Project: _____	Boring/Test Number: 	r, radius of boring: _____ ft	Date: _____
Test Location: _____ _____	D, boring depth below ground surface: _____ ft		Condition I: T _u ≥ 3h
	h, depth of water maintained from bottom of hole: _____ ft		
BMP Invert: _____	W, water table, or impervious layer, depth below ground surface: _____ ft		Condition II: h ≤ T _u ≤ 3h
Water Source: _____	T _u , depth to water table or impervious layer from surface of water maintained: _____ ft		Note: T _u = W - D + h
Turbidity: _____	Water level determined by: <input type="checkbox"/> Flow meter <input type="checkbox"/> Float valve <input type="checkbox"/> Calibrated tank		
Tested By: _____	S, Anticipated Specific Yield: _____ S = 0.1 for fine grained & 0.35 for coarse grained.		

$$V_{min} = 2.09S \left\{ h - \frac{2}{\sqrt{\ln\left(\frac{h}{r} + \sqrt{\left(\frac{h}{r}\right)^2 + 1}\right)} - 1} \right\}^3$$
 Example: h = 3.5 ft, r = 0.5 ft, and S = 0.15, then the minimum water volume (V_{min}) needed for testing is 51 ft³ or 381 gal.

V_{max} = 2.05V_{min} Example: maximum water volume needed for testing, 381 gal(2.05) = 781 gal.

Trial No.	Date	Time (24hr format)	Time Interval	Accumulated Time min	Flow Meter / Tank Readings		Accumulated Flow gallons	Water Temp. °F	Flow Rate, Q		Remarks: weather conditions, etc.
		hh:mm	min		gallons	Δ (gallons)			gpm	ft ³ /min	
1											
2											
3											
4											
5											
6											
7											
8											
9											
10											
11											
12											

WELL PERMEAMETER TEST
(reference USBR 7300-89)

Project:	Practice Infiltration Testing
Test Location:	123 Drive Road, Alhambra, CA N33° 53' 12.1" W118° 21' 27.6"

Boring/Test Number: r, radius of boring: 0.5 ft Date: 5/4/1990

D, boring depth below ground surface: 6.0 ft

Condition I:

$$T_u \geq 3h$$

W, water table, or impervious layer, depth below ground surface: 7.0 ft

Condition II:
 $h \leq T_{\text{eff}} \leq 3h$

BMP Invert: 5' below existing ground surface

T_u , depth to water table or impervious layer from surface of water maintained: 4.5 ft Note: $T_u = W - D + h$

Water Source: Potable Water

Turbidity:

Water level determined by: ☒ Flow meter ☐ Float valve ☐ Calibrated tank

Tested By: YH & CM

S, Anticipated Specific Yield: 0.15 S = 0.1 for fine grained & 0.35 for course grained.

$$V_{\min} = 2.09 S \left[h \frac{2}{\sqrt{\ln \left(h/r + \sqrt{(h/r)^2 + 1} \right)} - 1} \right]$$


³ Example: $h = 3.5$ ft, $r = 0.5$ ft, and $S = 0.15$, then the minimum water volume (V_{\min}) needed for testing is 51 ft^3 or 381 gal.

$$V_{\max} = 2.05V_{\min}$$


Example: maximum water volume needed for testing, $381 \text{ gal}(2.05) = 781 \text{ gal.}$

[illegible]

Example Time-Discharge Curve

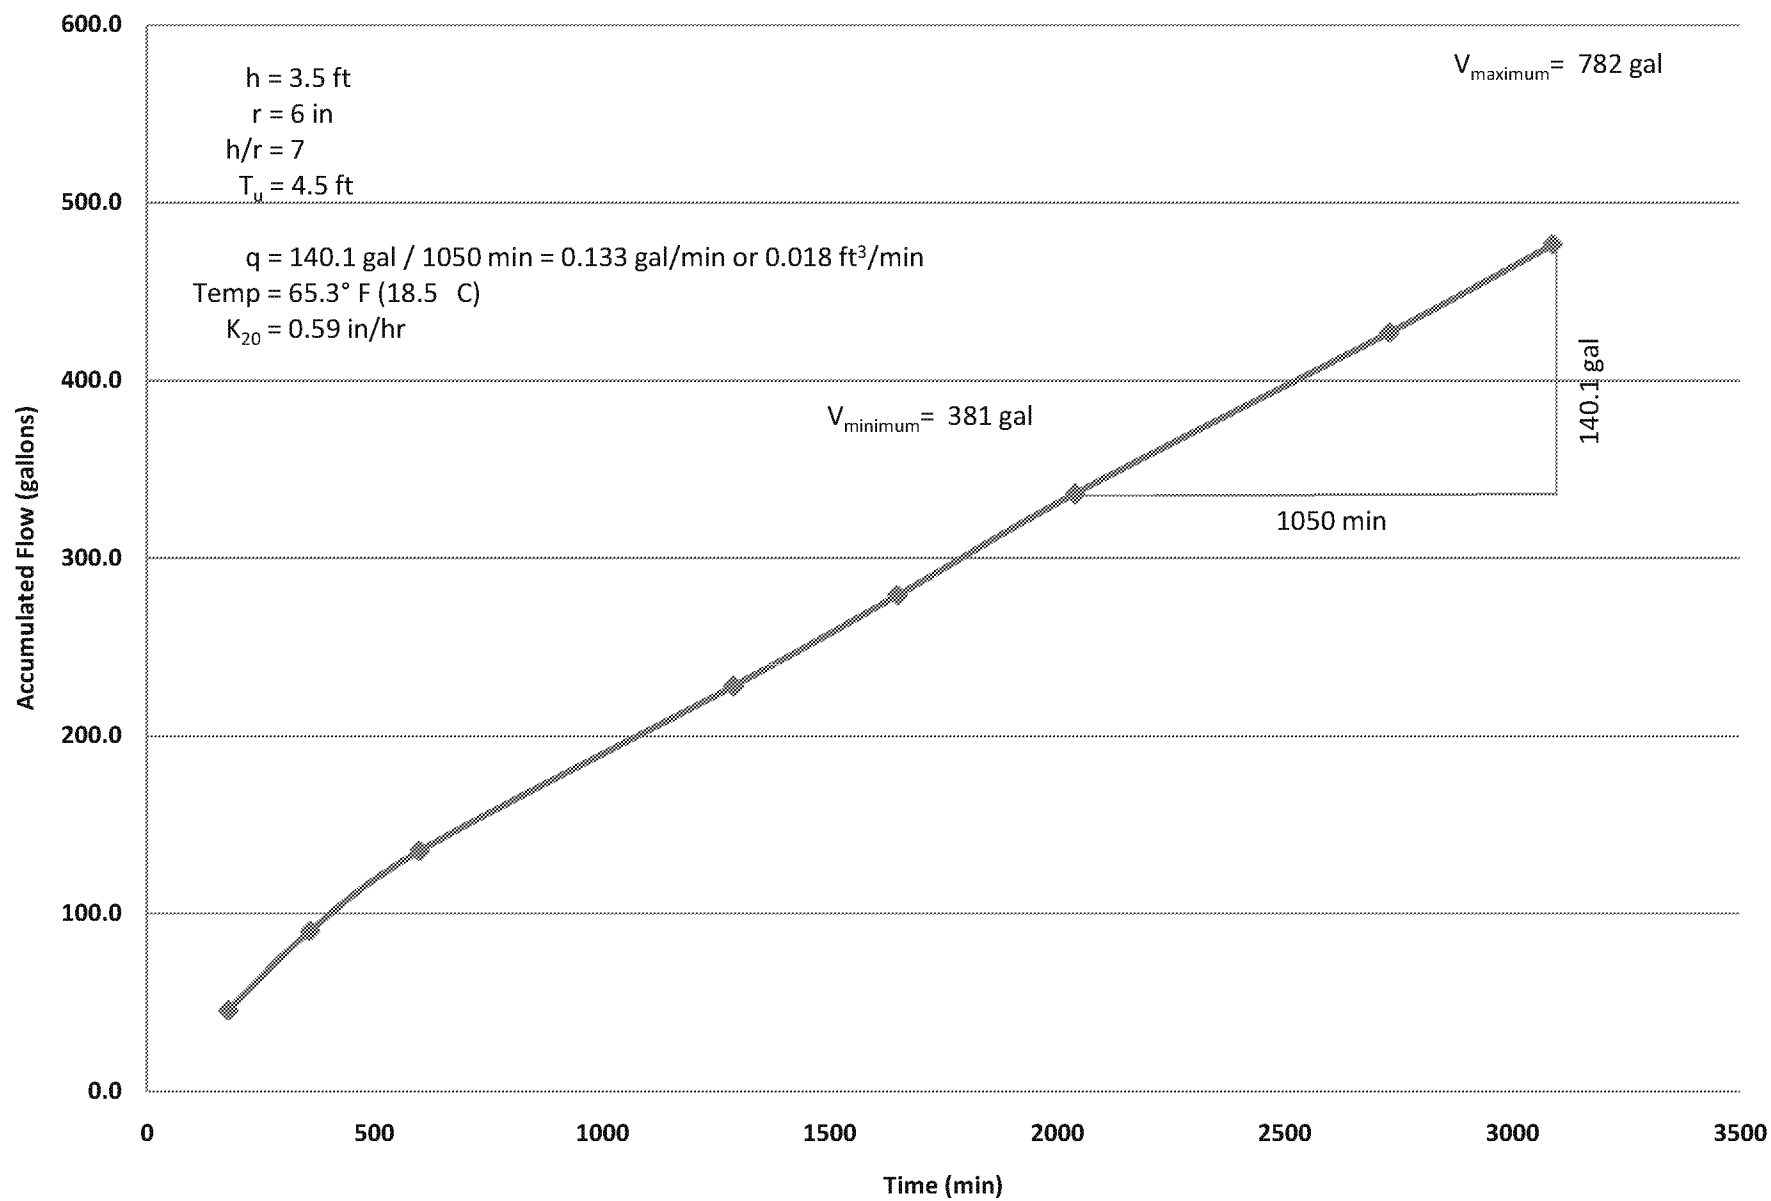

County of Los Angeles Administrative Manual
Low Impact Development - Best Management Practice GS200.1
Infiltration Testing Procedures
Boring Percolation Testing Method

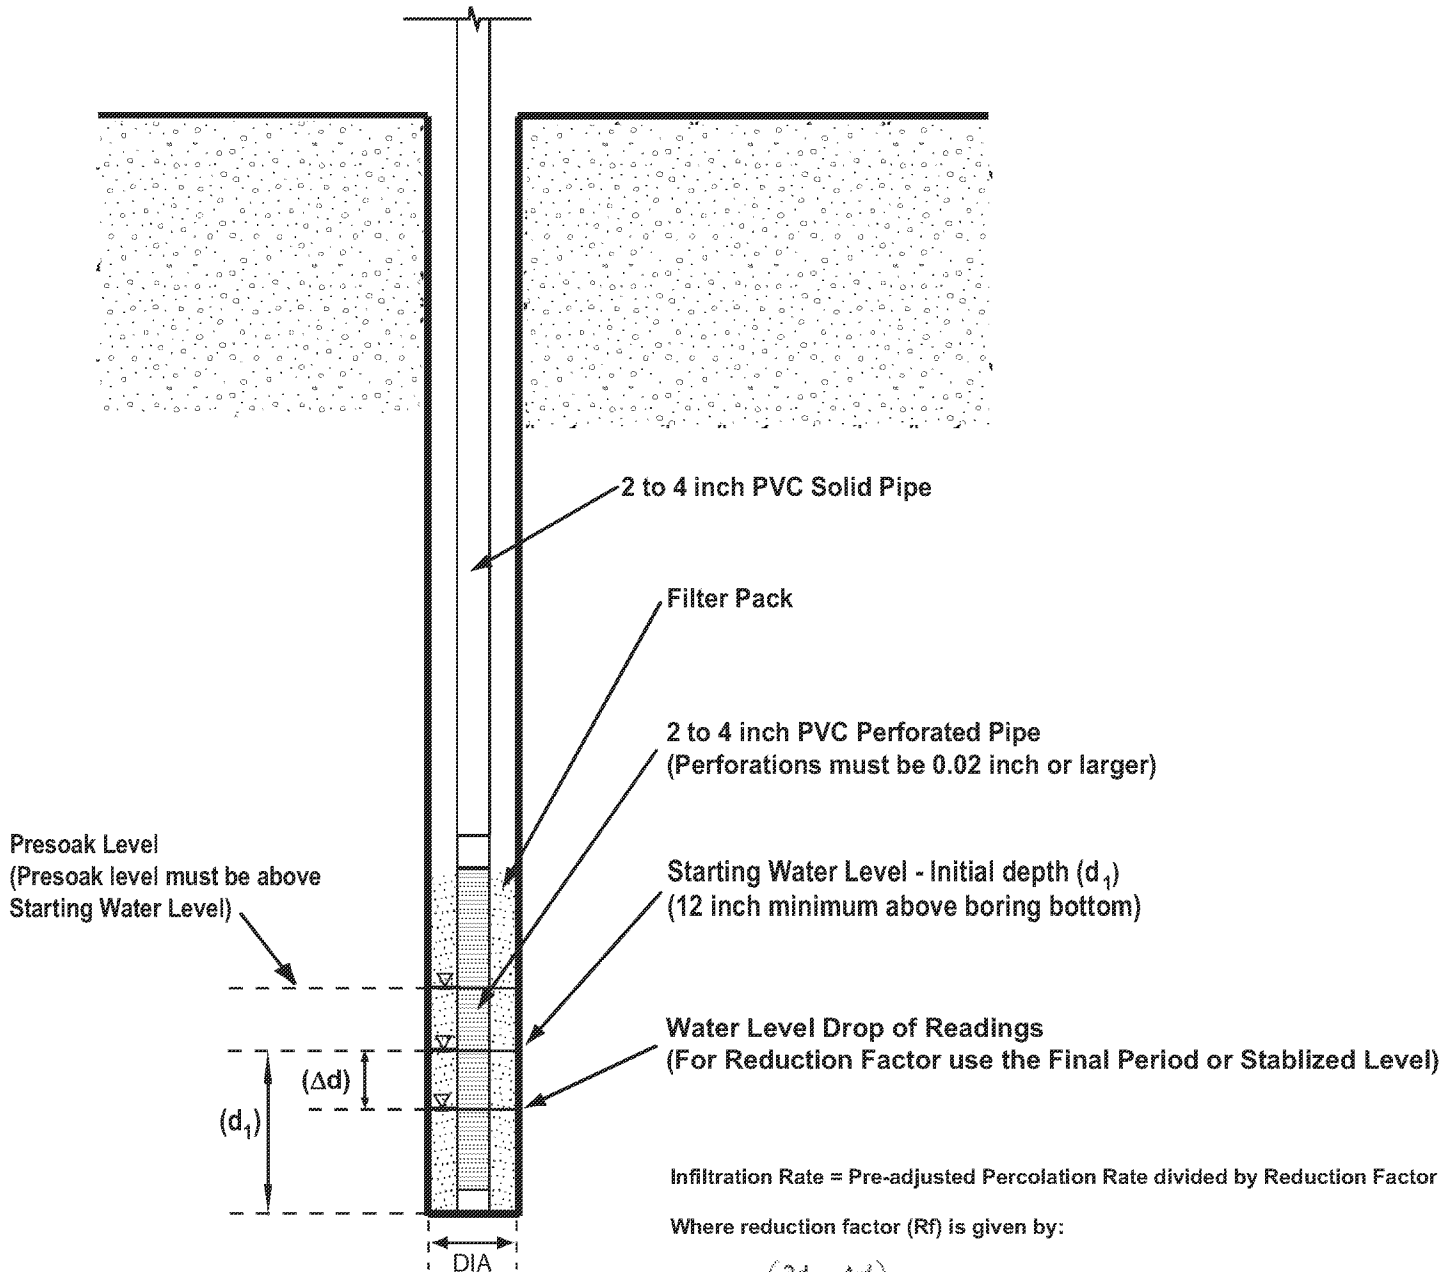

$$R_f = \left(\frac{2d_1 - \Delta d}{DIA} \right) + 1$$


With:

d_1 = Initial Water Depth (in.)

Δd = Water Level Drop of Final Period or Stabilized Level (in.)

DIA = Diameter of the boring (in.)

County of Los Angeles Administrative Manual
Low Impact Development - Best Management Practice GS200.1
Infiltration Testing Procedures
Excavation Percolation Testing Method

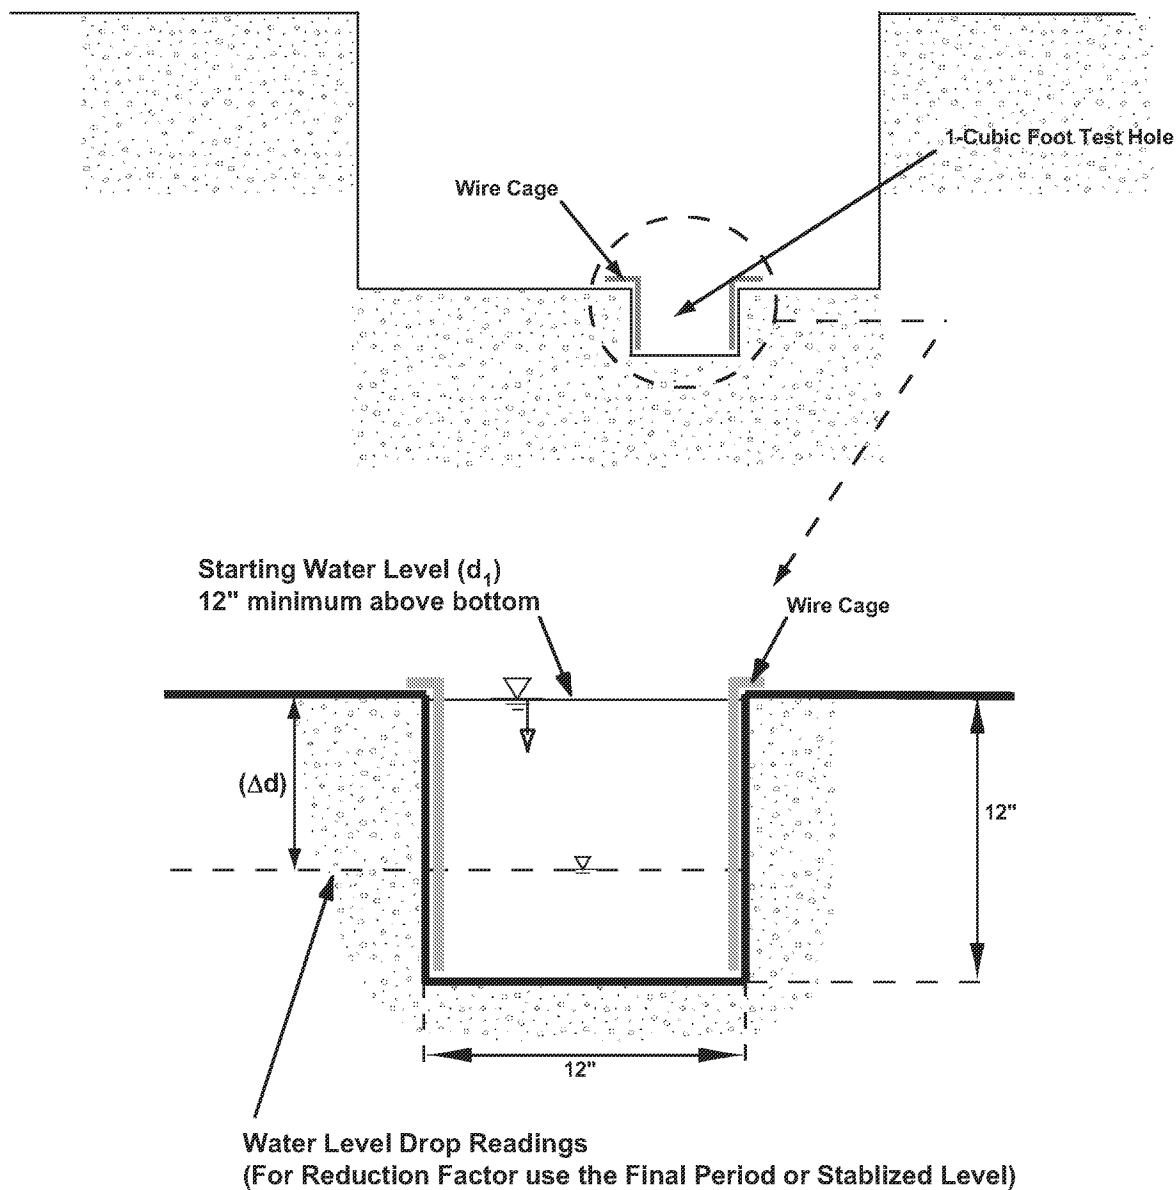

Infiltration Rate = Pre-adjusted Percolation Rate divided by Reduction Factor

Where reduction factor (Rf) is given by:

$$R_f = \left(\frac{2d_1 - \Delta d}{DIA} \right) + 1$$

With:

d_1 = Initial Water Depth (in.)

Δd = Water Level Drop of Final Period or Stabilized Level (in.)

DIA = 13.5 (Equivalent Diameter of the Boring)(in.)

Boring/Excavation Percolation Testing Field Log

Date _____

Project Location _____
Earth Description _____
Tested by _____
Liquid Description _____
Measurement Method _____

Boring/Test Number _____
Diameter of Boring _____ Diameter of Casing _____
Depth of Boring _____
Depth to Invert of BMP _____
Depth to Water Table _____
Depth to Initial Water Depth (d₁) _____
Water Remaining In Boring (Y/N) _____
Standard Time Interval Between Readings _____


Time Interval Standard _____
Start Time for Pre-Soak _____
Start Time for Standard _____

Reading Number	Time Start/End (hh:mm)	Elapsed Time Δtime (mins)	Water Drop During Standard Time Interval Δd (inches)	Percolation Rate for Reading (in/hr)	Soil Description/Notes/Comments

Appendix A

United States Bureau of Reclamation

Test Method 7300-89



PROCEDURE FOR PERFORMING FIELD PERMEABILITY TESTING BY THE WELL PERMEAMETER METHOD

INTRODUCTION

This procedure is under the jurisdiction of the Geotechnical Services Branch, code D-3760, Research and Laboratory Services Division, Denver Office, Denver, Colorado. The procedure is issued under the fixed designation USBR 7300. The number immediately following the designation indicates the year of acceptance or the year of last revision.

1. Scope

1.1 This designation is used to determine the coefficient of permeability of semipervious and pervious soils. The types of soil for which the test is applicable range from mixtures of sand, silt, and clay with coefficients of permeability greater than 1×10^{-5} cm/s to relatively clean sands or sandy gravels with coefficients of permeability less than 1×10^{-1} cm/s. There is lack of experience with the test in soils with coefficients of permeability outside these limits. The effects of capillarity on permeability test results were not taken into account during development of the theoretical background.

NOTE 1.-This test is similar to the "Shallow Well Pump-in Test for Hydraulic Conductivity" in the *Drainage Manual* [1].¹ However, some of the float valves allow greater waterflow from the water reservoir than the carburetor valve of the *Drainage Manual* test.

2. Auxiliary Tests

2.1 Soil sampling by USBR 7010 and classification of soil from different strata by USBR 5005 are required to identify soil stratification and location of any water table.

3. Applicable Documents

3.1 USBR Procedures:

USBR 3900 Standard Definitions of Terms and Symbols Relating to Soil Mechanics
USBR 5005 Determining Unified Soil Classification (Visual Method)
USBR 7010 Performing Disturbed Soil Sampling Using Auger Boring Method

3.2 ASTM Standard:

E 1 ASTM Thermometers

4. Summary of Method

4.1 The method consists of measuring the rate at which water flows out of an uncased well under a constant gravity

head. The coefficient of permeability of the soil is calculated using (1) the relatively constant flow rate which is reached after a period of time, (2) the water temperature, (3) the constant height of water in the well, and (4) the radius of the well.

5. Significance and Use

5.1 The method is used to determine the average coefficient of permeability for soil in its natural condition, primarily along proposed canal alignments or at reservoir sites. The permeability results are used in appropriate equations for calculating approximate seepage rates to aid in decisions on lining requirements. Although the test is usually performed in auger holes, it can also be used in test pits.

6. Terminology

6.1 Definitions are in accordance with USBR 3900.

7. Interferences

7.1 Proper use of the test requires soil characteristics which allow excavation of an uncased well of reasonably uniform dimensions with the soil sufficiently undisturbed to allow unrestricted outward flow of water from the hole.

7.2 Test results are adversely affected by using unclean water for the permeant.

7.3 When relatively impervious or highly pervious soil layers are present around the well, this should be considered when evaluating test results.

7.4 For tests during cold weather, a shelter with heat should be used to maintain ground and water temperatures above freezing.

8. Apparatus

8.1 General Apparatus:

8.1.1 Augers.-Hand augers suitable for excavating permeability test holes. Power-driven augers may be used if it is determined that disturbance of soil around the well is no more than for a hand auger.

¹ Number in brackets refers to the reference.

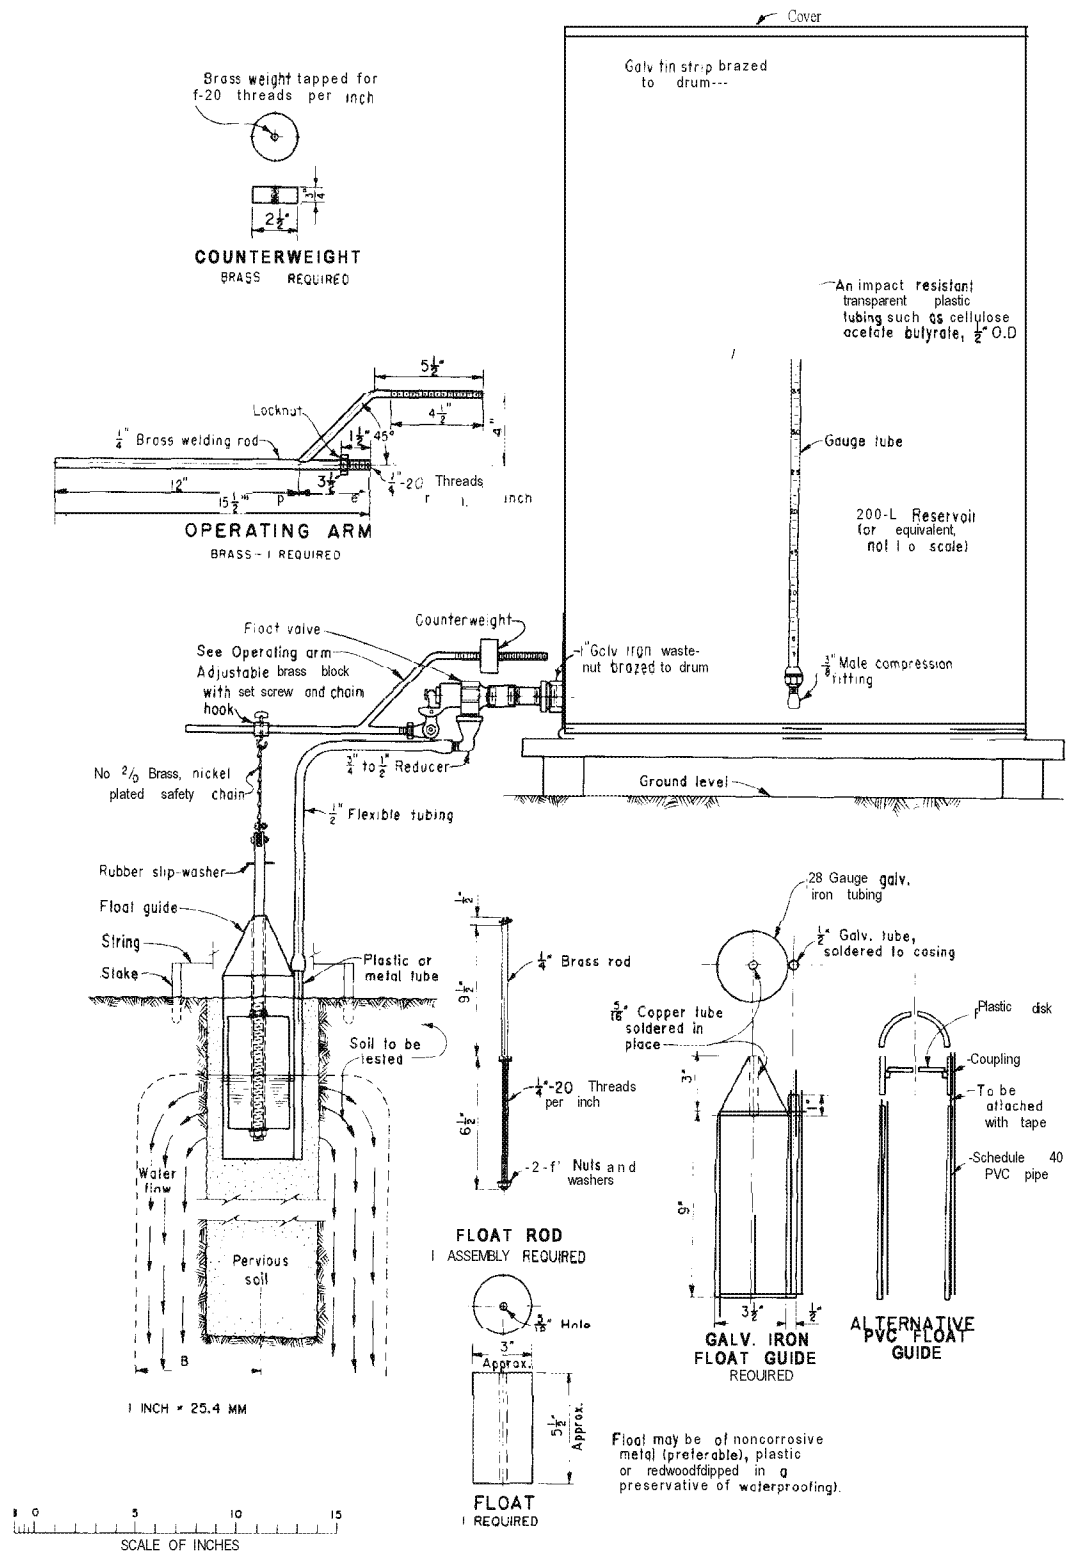


Figure 1. Drawing of well permeameter test apparatus (101-D-38)

8.1.2 Thermometer.—0 to 50 °C, 0.5 °C divisions, conforming to the requirements of ASTM E 1.

8.1.3 Hammer, surveyors' stakes, and string for depth measurements in the well.

8.2 Equipment Unique to This Procedure (see figs. 1 and 2).

8.2.1 Water Reservoir.—A clean, covered, watertight reservoir of sufficient capacity which can be conveniently refilled at intervals to provide a continuous supply of water during the test. A 200-liter drum with a volume gauge tube of cellulose acetate butyrate has been found to be suitable for normal usage. Wooden blocking is required to raise the reservoir above the ground level.

8.2.2 K&e.—A float valve with operating arm (see fig. 3 for valve size).

8.2.3 Float.—A wooden, plastic, or metal float with brass stem.

8.2.4 Float Guide.—A guide of galvanized iron, PVC (polyvinyl chloride) or other materials to allow the float to move vertically.

8.2.5 Counterweights.—Brass counterweights for arm of float valve.

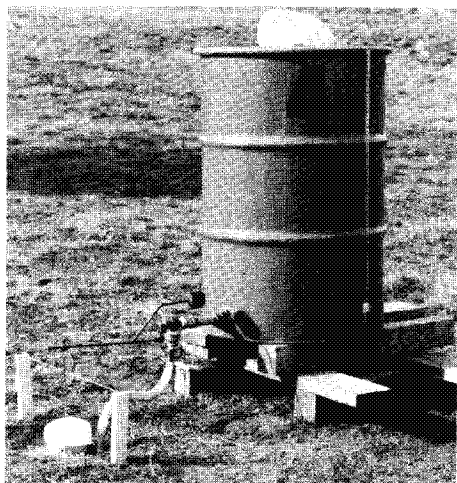


Figure 2. — Typical well permeameter test set-up.

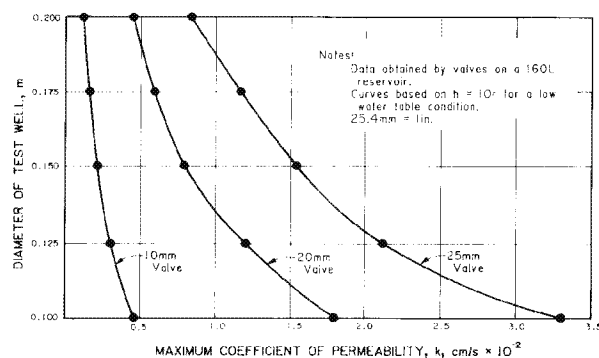


Figure 3. Maximum permeability coefficients measurable with typical float valves commonly used on stock-watering tanks.

NOTE 2.—There may be other appropriate valve-float equipment available for maintaining a constant water level in the test well.

8.2.6 Water Truck.—A water tank truck or tank trailer of sufficient capacity to provide a continuous supply of clean water for the number of test reservoirs in simultaneous use.

9. Reagents and Materials

9.1 Density San&Clean, dry, pervious, coarse sand (or fine gravel) calibrated for density and with a coefficient of permeability at least 1×10^2 cm/s greater than that of the soil to be tested is to be used for backfilling the test well. A washed sand graded between the U.S.A. Standard series No. 4 to No. 8 sizes (4.75 to 2.36 mm) or gravel graded between the 3/8 to No. 4 (9.5 to 4.75 mm) sizes is recommended. The purpose of the pervious backfill is to (1) distribute water evenly in the well, (2) support the wall of the well and prevent sloughing during saturation of the soil, and (3) provide a means of indirectly determining the average radius of the well. The radius of the well is required for permeability calculations and, as explained later, a standard sand calibrated for mass per unit volume (density) can serve this purpose.

9.2 Water.—The water for this test is to be clean. Small amounts of suspended soil or other foreign material in the water may become deposited in the soil around the well and may greatly reduce the flow, causing erroneous results. When there is sediment in the water, arrangement should be made to remove the particles by settling or filtration. In some instances, a chemical reaction can take place between water of a particular quality and the soil being tested, which may cause an increase or decrease in soil permeability. Therefore, water similar in quality (exclusive of suspended sediment) to that expected to permeate the soil during project operation should be used for the permeability test.

10. Precautions

10.1 Safety Precautions.—Normal precautions taken for any fieldwork.

10.2 Technical Precautions:

10.2.1 In windy areas, protection from blowing soil may be needed to prevent interference to the operation of the valve-float mechanism and to prevent infiltration of soil into the top of the well.

10.2.2 Test equipment must be protected from disturbance by animals, moving equipment, children, or other sources.

11. Calibration

11.1 Water Reservoir (fig. 1).—Calibrate the volume of the water reservoir and mark the gauge tube in convenient increments for volume readings. For a 200-L reservoir, mark the volume gauge tube at 5-L intervals with the largest volume reading near the top of the tube

so volume readings will decrease downward and permit volume determination by subtracting figures.

NOTE 3.—For a volume tube of cellulose acetate butyrate (which is recommended because it is durable for use under field conditions), ink with an acetate base makes a permanent mark on the tube. India ink can be used for marking if the surface of the plastic is first roughened with emery cloth or steel wool; the tube then should be coated with clear lacquer to preserve the ink marks.

11.2 Density San&Calibrate the sand by finding the density obtained by pouring the sand into a pipe or cylinder with dimensions approximately those of the test well. The pouring height above the top of the pipe should be approximately the same as that for the well. The calibrated density of sand is calculated from the mass of sand used to fill the pipe and the volume of pipe occupied by the sand; i.e., density equals mass per volume.

12. Conditioning

12.1 Special conditioning requirements are not needed for this procedure.

13. Procedure

13.1 Soil Logs.—Prior to performing field permeability tests for a seepage investigation, exploratory borings should be made at appropriate intervals and logs of the borings should be prepared to show a representative soil profile. Soil classifications of the different strata encountered should be recorded. The form shown in figure 4 can be used for this purpose.

The minimum depth of borings below a proposed canal invert or reservoir bottom should be to the ground-water table, to an impervious soil layer, or to a depth about twice the design water depth, whichever is reached first (see fig. 8). The location of soil layers that appear to be impervious and the depth to a water table, if reached, will affect permeability and seepage calculations. For depths below a canal invert or reservoir bottom greater than twice the water depth, the presence of a water table or soil layers of significantly different permeability than that of overlying soil will not influence permeability test results.

13.2 Size of Test We&For a low water table condition (see condition I, fig. 8), the depth of the well may be of any desired dimension provided the ratio of water height h in the well to well radius is greater than 1. To fulfill theoretical considerations in development of the equations for high water table conditions (conditions II and III, fig. 8), the ratio of water height h in the well to well radius should be greater than 10. A practical well diameter is usually 150 mm. Normally, in a canal seepage investigation, the water surface elevation in the well and the well bottom should correspond to the elevations of the proposed canal water surface and canal bottom, respectively. Test results would then provide an average permeability for the soils in the canal prism. For pervious soils, well size is limited

by the capacity of the equipment to maintain a continuous supply of water at the desired constant head level. If necessary, more than one reservoir can be interconnected to increase water capacity. Figure 3 shows the maximum coefficients of permeability that can be measured in wells of various diameters using float valves of different sizes. This is of assistance in selecting the valve size to be used, although a valve of approximately 20-mm size is often used for general purposes.

13.3 Soil Permeability in Test Pits.—The well permeameter test method also can be adapted for use in test pits in a low water table condition if the ratio of water depth to pit radius is greater than 1, and sand or gravel backfill is used to prevent soil in the sides of the pit from sloughing. In this case, calibration of backfill is not necessary since dimensions of a test pit of regular shape can be found by averaging linear measurements. If a rectangular pit is used, the effective cylindrical radius for use in permeability calculations can be determined from the pit dimensions (see fig. 5).

13.4 Excavation of the Test Well.—Wells for permeability tests should be prepared carefully to cause as little disturbance to surrounding soil as possible. Where moisture content of the soil is high, the wall of the hole can become smeared and outward flow of water restricted. In this case, the well should be excavated using two hand augers, one having a diameter at least 25 mm smaller than the other. First, auger a pilot hole with the smaller auger and follow this with the larger auger. This causes less disturbance to the wall of the well than if a single auger is used. If it is still apparent that the wall of the well is smeared, the walls should be scraped or scratched with improvised tools to remove the smeared surface. Remove any loose soil from the bottom of the well.

13.5 Depth of the Well (figs. 1 and 4).—Depth measurements in the well should be measured (and recorded) from a common base line. A convenient method is to measure from a horizontal string line stretched between two stakes driven firmly into the ground on opposite sides of the well (fig. 1). When the bottom of the well extends below ground-water level, insert a casing during excavation to prevent the wall from caving. Carefully pull the casing as the well is backfilled with sand through the casing.

NOTE 4.—For a very high ground-water condition, a “pump out” test for saturated soils is often more satisfactory than the well permeameter test or other “pump in” types of tests.

13.6 Backfilling the Test Well.—Pour calibrated sand into the well in the same manner as during calibration of the sand for density. The top of the sand should be about 150 mm below the water level to be maintained. After completion of pouring, determine the remaining mass of sand and subtract from the original mass to find the mass of sand in the well. Measure and record the depth to the top of the sand and calculate the height of sand in the well. From the density of the calibrated sand and the mass and height of sand in the well, calculate the

7-1429 (5-89) Bureau of Reclamation		WELL PERMEAMETER METHOD (SOIL CLASSIFICATIONS AND WELL DIMENSIONS)			Designation U S B R 7 3 0 0 - 89	
EST NO. 22		PROJECT Example		FEATURE Example		
EST LOCATION Station 257+94			TEST LIMITS: STATION 257+25 TO STATION 258+62			
ROUND ELEVATION 122.6		CANAL DATA: SIDE SLOPES 2:1		BOTTOM WIDTH 7.9 m WATER DEPTH 1.890 m		
ESTED BY		DATE		COMPUTED BY		
				DATE		
				CHECKED BY		
				DATE		

<input checked="" type="checkbox"/> m <input type="checkbox"/> ft STRATA FROM DEPTH TO <u>0</u> <u>0.45</u> <hr/> <hr/> <hr/> <u>0.45</u> <u>1.77</u> <hr/> <hr/> <hr/> <u>1.77</u> <u>3.87</u> <hr/> <hr/> <hr/>	<p style="text-align: center;">OBSERVATION HOLE</p> <p style="text-align: center;">SOIL CLASSIFICATION</p> <p>SILTY CLAY : approx. 85% fines with medium plasticity, slow dilatancy, medium dry strength, medium toughness; approx. 15% fine sand; maximum size, fine sand, moist, dark gray; easy to auger; some roots present; no reaction with HCl (CL-ML).</p> <p>CLAYEY SILT : approx. 95% fines with low plasticity, slow dilatancy, low dry strength, low toughness; approx. 5% fine sand; maximum size, fine sand; wet, brown; easy to auger; no reaction with HCl (ML-CL).</p> <p>SILTY SAND : approx. 60% fine to coarse, hard, angular sand; approx. 20% non-plastic fines; approx. 20% predominantly fine, hard, angular to subangular gravel; maximum size, 30mm; moist, brown; moderately hard to auger; slight reaction to HCl (SM).</p>
---	---

(1) DEPTH TO WATER TABLE (FROM GROUND SURFACE)	3.75	<input checked="" type="checkbox"/> m	<input type="checkbox"/> ft
WELL DIMENSIONS (DEPTHS FROM STRING BASELINE)			
(2) DEPTH TO GROUND SURFACE	0.213	<input type="checkbox"/> m	<input type="checkbox"/> ft
(3) DEPTH TO BOTTOM OF WELL	1.222	<input type="checkbox"/> m	<input type="checkbox"/> ft
(4) DEPTH TO TOP OF SAND	0.375	<input checked="" type="checkbox"/> m	<input type="checkbox"/> ft
(5) HEIGHT OF SAND (3) - (4)	0.847	<input checked="" type="checkbox"/> m	<input type="checkbox"/> ft
(6) DEPTH TO WATER SURFACE IN WELL	0.280	<input checked="" type="checkbox"/> m	<input type="checkbox"/> ft
(7) HEIGHT OF WATER IN WELL h = (3) - (6)		<input type="checkbox"/> m	<input type="checkbox"/> ft
DETERMINATION OF WELL RADIUS			
(8) DENSITY OF STANDARD SAND	1400	<input type="checkbox"/> kg/m ³	<input type="checkbox"/> lbm/ft ³
(9) MASS OF SAND + CONTAINER BEFORE FILLING WELL	34.02	<input type="checkbox"/> kg	<input type="checkbox"/> lbm
(10) MASS OF SAND + CONTAINER AFTER FILLING WELL	2.86	<input type="checkbox"/> kg	<input type="checkbox"/> lbm
(11) MASS OF SAND USED (9) - (10)	31.16	<input type="checkbox"/> kg	<input type="checkbox"/> lbm
(12) VOLUME OF WELL (11)/(8)	0.0223	<input type="checkbox"/> m ³	<input type="checkbox"/> ft ³
(13) RADIUS OF WELL $r = \sqrt{(12)/(5) \pi}$	0.092	<input checked="" type="checkbox"/> m	<input type="checkbox"/> ft

Figure 4. - Well permeameter method (soil classifications and well dimensions) — example

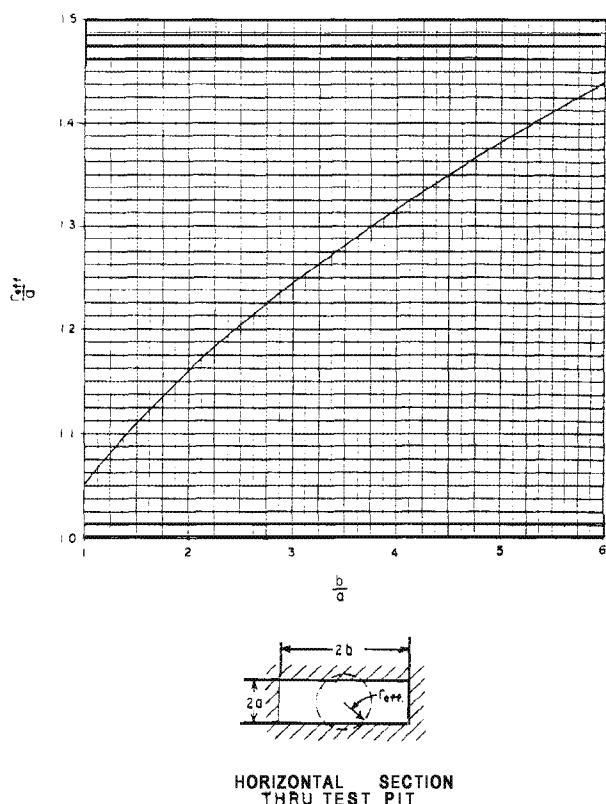


Figure 5. Effective cylindrical radius of rectangular test pits.
(fig. 44 of ref. 2)

equivalent radius of the well (fig. 4). Development of the equation for determining the radius is:

$$\begin{aligned} V_s &= \pi r_w^2 h_s = \frac{m_s}{\rho_s} \\ r_w^2 &= \frac{V_s}{\pi h_s} \\ r_w &= \sqrt{\frac{m_s}{\pi h_s \rho_s}} \end{aligned} \quad (1)$$

where:

- V_s = volume of sand
- ρ_s = density of sand
- h_s = height of sand
- m_s = mass of sand
- r_w = equivalent radius of well

13.7 Test Equipment Set Up.-Place the float guide, with the float inside, on top of the sand in the well. Hold the float guide in place vertically and pour sand around it. When a test is to be conducted with the water level more than an arm's length below the ground surface, lower the float guide by the chain and drop sand around the guide to hold it in place during the test. The rubber slip

washer on the float stem is to prevent particles of sand from becoming lodged between the float stem and the float guide. The mass of sand around the guide need not be known because it is not used in computations for well radius. Set up the water reservoir and valve-float arrangement with the flexible tube from the float valve to well and the chain attached to the float stem as shown on figures 1 and 2. The reservoir should be set on a firm platform or cribbing at a convenient height.

13.8 Performing the Test:

13.8.1 Open the valve on the reservoir and gradually fill the well with water.

13.8.2 After the water enters the float casing, readjust the counterbalance on the operating arm of the valve and the chain length as necessary to maintain the desired water level in the well.

13.8.3 After the water level in the well has stabilized, begin reading the volume gauge on the reservoir and record the gauge readings at convenient time intervals using the form as shown on figure 6. The well must be kept continuously full of water until the test is completed. In general, dry soil at the start of the test absorbs water at a comparatively high rate. However, as the moisture content of the soil increases around the well, the rate generally decreases and usually stabilizes. It is this constant rate after stabilization that is used to compute permeability.

13.8.4 As records of water discharge from the reservoir and time are made, plot a curve of accumulative flow versus time as shown on figure 7.

14. Test Duration

14.1 Minimum duration for the test is the theoretical time required to discharge the minimum volume of water into the soil to form a saturated envelope of hemispherical shape with a radius B (see fig. 1).

The minimum volume of water is determined by the equation:

$$V_{min} = 2.09 S \left\{ h \sqrt{\ln \left[\frac{h}{r} + \sqrt{\left(\frac{h}{r} \right)^2 + 1} \right] - 1} \right\}^3 \quad (2)$$

where:

- V_{min} = minimum volume
- S = specific yield of the soil
- h = height of water in well
- r = well radius

NOTE 5.-The quantity in brackets is the theoretical determination for radius B (fig. 1).

For soils in which this test would most likely be used, the specific yield varies from about 0.1 for fine-grained soils to 0.35 for coarse-grained soils. When the specific yield of the soil is unknown, the value of 0.35 should be used to give a conservative value for minimum volume and to ensure that the test duration is sufficient. Thus,

7-1428 (5-89) Bureau of Reclamation		WELL PERMEAMETER METHOD (TIME AND VOLUME MEASUREMENTS)				Designation USBR 7300 - 89			
TEST NO. 22		PROJECT Example				FEATURE Example			
TEST LOCATION 257+94		WATER SOURCE Youngfield River				GROUND TEMPERATURE 20° C			
TESTED BY		DATE		COMPUTED BY		DATE		CHECKED BY	
TIME		WATER VOLUME <input checked="" type="checkbox"/> L <input type="checkbox"/> ft ³						WATER TEMPERATURE °C	
CLOCK (24hr.)	ACCUM. (min.)	DRUM NO. 3		DRUM NO. 4		TOTAL DIFFERENCE	ACCUM. FLOW (q)	WELL	RESERVOIR
		READ	DIFFERENCE	READ	DIFFERENCE				
8:00	0	201	--	204	--	---	---	--	--
8:50	50	127	74	124	80	154	154	19	25
9:40	100	80	47	74	50	97	251	19	--
10:30	150	42	36	34	40	76	329	19	--
11:20	200	8	34	1	33	67	396	20	26
11:30	210	202	--	201	--	--	---	--	--
12:10	250	179	23	179	22	45	441	20	--
13:00	300	153	26	153	26	52	493	21	--
13:50	350	124	29	125	28	57	550	21	27
14:40	400	97	27	98	27	54	604	22	--
15:30	450	71	26	70	28	54	658	22	--
16:20	500	46	25	44	26	51	709	21	--
17:10	550	19	27	19	25	52	761	20	--
17:20	560	204	--	202	--	--	---	--	--
18:00	600	181	23	181	21	44	805	20	27
18:50	650	154	27	154	27	54	859	20	--
19:40	700	127	27	127	27	54	913	19	--
20:30	750	100	27	99	28	55	960	19	--
21:20	800	74	26	73	26	52	1020	18	25
23:00	900	35	39	33	40	79	1099	17	--
24:40	1000	5	30	3	30	60	1159	15	--

Figure 6. Well permeameter method (time and volume measurements) — example.

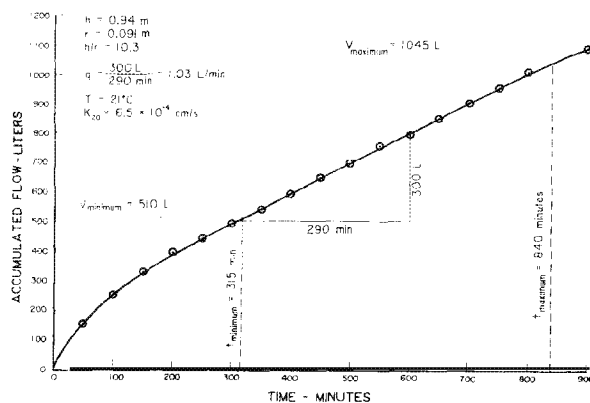


Figure 7. — Time-discharge curve for well permeameter test — low water table example.

with a known or assumed specific yield for the soil and with the dimensions of the well, the minimum volume can be computed and the test discontinued when the minimum volume has been discharged through the well. In pervious soils, it may appear that the volume-time curve has reached a uniform slope after several hours when points are plotted over short time intervals. However, in order to avoid discontinuing a test prematurely, it must be continued for at least 6 hours from the starting time so the slope can be determined over a period of 2 to 3 hours. The first straight portion of the curve should be used for determining the rate of discharge (fig. 7). The test must be conducted continuously without allowing the reservoir to run dry until the test has been completed.

14.2 Maximum Time.—If the test is continued for a long period, a water mound may build up around the well and render the test results inaccurate. The maximum time for test duration is the time necessary to discharge through the test well the maximum volume of water as determined using equation (2), substituting 15.0 for 2.09 and in this case, using an assumed minimum value (when the true value is unknown) of 0.1 for specific yield.

$$V_{max} = 2.05 V_{min} \quad (3)$$

15. Calculations

15.1 Computing Coefficient of Permeability.—Equations (4), (5), or (6) are provided for calculating coefficient of permeability, for the well permeameter test. The presence or absence of a water table or impervious soil layer within a distance of less than three times that of the water depth in the well (measured from the water surface) will enable the water table to be classified as condition I, II, or III, as illustrated on figure 8.

15.1.1 Low Water Table.—When the distance from the water surface in the test well to the ground-water table, or to an impervious soil layer which is considered for test purposes to be equivalent to a water table, is greater than three times the depth of water in the well, a low water

table condition exists as illustrated by condition I (fig. 8). For determination of the coefficient of permeability under such a condition, equation (4) given in subparagraph 15.2 should be used.

15.1.2 High Water Table.—When the distance from the water surface in the test well to the ground-water table, or to an impervious layer, is less than three times the depth of water in the well, a high water table condition exists as illustrated by condition II or III. Condition II shows a high water table with the water table below the well bottom, and for this condition equation (5) should be used. Condition III shows a high water table with the water table above the well bottom. For this condition, equation (6) should be used.

15.2 Equations:

Condition I:

$$k_{20} = \frac{qV}{2\pi h^2} \left\{ \ln \left[\frac{h}{r} + \sqrt{\left(\frac{h}{r}\right)^2 + 1} \right] - \frac{\sqrt{1 + \left(\frac{h}{r}\right)^2}}{\frac{h}{r}} + \frac{1}{\frac{h}{r}} \right\} \quad (4)$$

Condition II:

$$k_{20} = \frac{qV}{2\pi h^2} \left[\frac{\ln\left(\frac{h}{r}\right)}{\frac{1}{6} + \frac{1}{3} \left(\frac{h}{T_u}\right)^{-1}} \right] \quad (5)$$

Condition III:

$$k_{20} = \frac{qV}{2\pi h^2} \left[\frac{\ln\left(\frac{h}{r}\right)}{\left(\frac{h}{T_u}\right)^{-1} + \frac{1}{2} \left(\frac{h}{T_u}\right)^{-2}} \right] \quad (6)$$

where:

k_{20} = coefficient of permeability at 20 °C

h = height of water in the well

r = radius of well

y = discharge rate of water from the well for steady-state condition (determined experimentally, see example, fig. 7)

$V = \frac{\mu T_u}{\mu_{20}}$ viscosity of water at temp. T (see fig. 9)
 μ_{20} , viscosity of water at 20 °C

T_u = unsaturated distance between the water surface in the well and the water table

15.3 The preferred metric unit for coefficient of permeability is cm/s (centimeters per second). The value of 1×10^{-6} centimeters per second is approximately the same as the inch-pound unit of 1 foot per year.

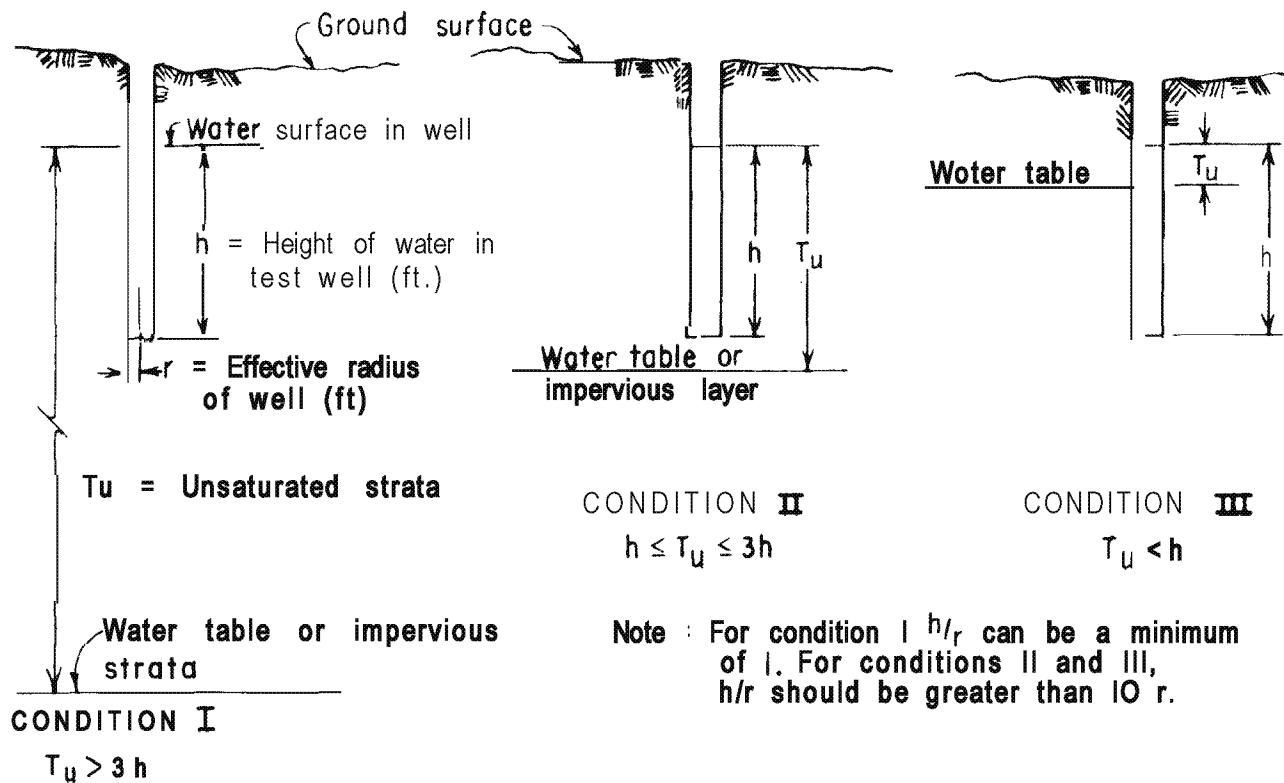


Figure 8. Relationship between depth of water in test well and distance to water table in well permeameter test.

16. Report

16.1 The report is to consist of the following completed and checked forms:

"Well Permeameter Method (Soil Classifications and Well Dimensions)" (fig. 4).

"Well Permeameter Method (Time and Volume Measurements)" (fig. 6).

Time-Discharge Curve (example on fig. 7).

Calculation of coefficient of permeability from equations (4), (5), or (6).

16.2 All calculations are to show a checkmark and all plotting must be checked.

17. References

- [1] *Drainage Manual*, 1st ed., Bureau of Reclamation, U.S. Government Printing Office, Washington, D.C., 1984.
- [2] Zanger, Carl Z., *Theory and Problems of Water Percolation*, Engineering Monograph No. 8, (app. B "Flow from a Test Hole Located Above Groundwater Level," development by R. E. Glover) Bureau of Reclamation, Denver, Colorado, April 1953.
- [3] Ribbens, R. W. "Exact Solution for Flow From a Test Hole Located Above the Water Table," (unpublished technical memorandum), Bureau of Reclamation, Denver, Colorado, 1981.

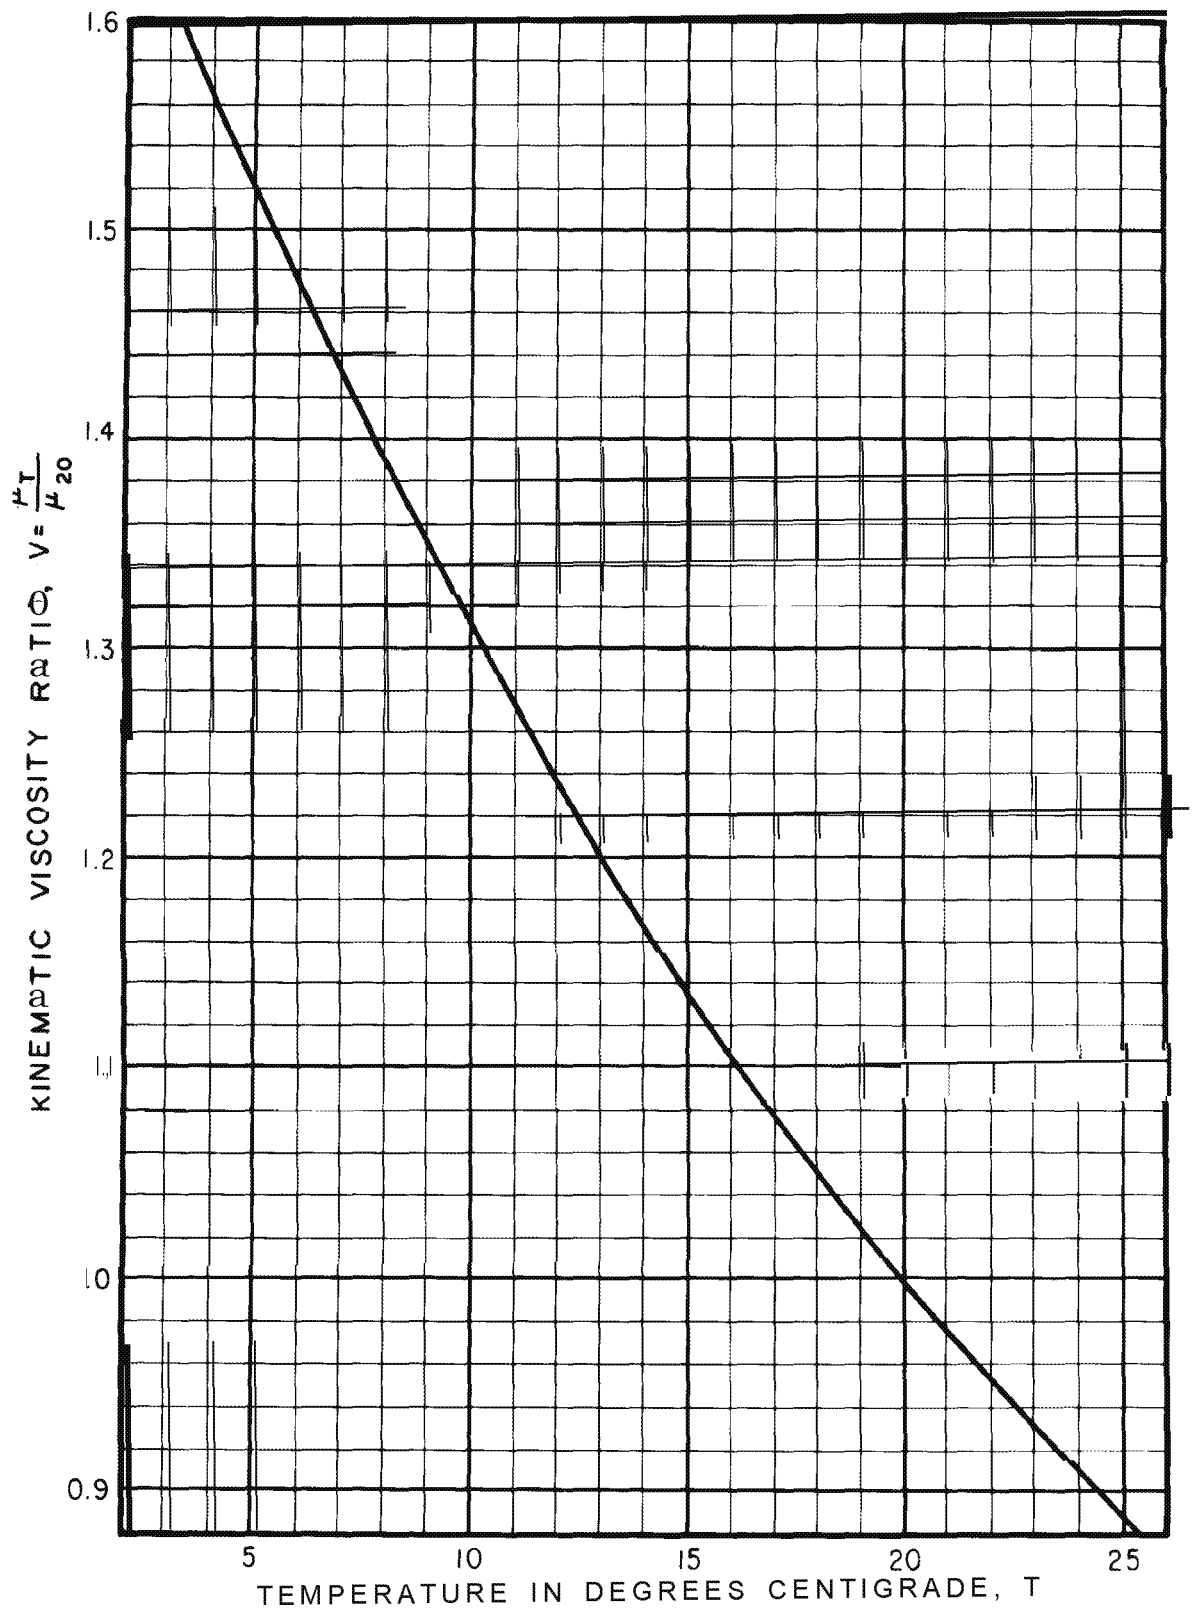


Figure 9. - Relationship between kinematic viscosity ratio of water and temperature

Appendix B

Procedure for New Percolation Basin Testing

ATTACHMENT 1

PERCOLATION BASIN TESTING PROCEDURE

Pretesting Preparation:

- Drill at least one boring to a minimum depth of 30 feet below the planned bottom of each proposed percolation basin. Additional borings must be performed in the area to establish continuity of subsurface materials. Each exploratory boring must be logged by a certified Engineering Geologist or Soils Engineer by either downhole logging or via samples obtained through the use of a continuous sampler.
- Create an excavation bottoming at the invert of the proposed basin. The consultant shall test a limited area through the use of an open-ended standpipe. The standpipe must be a minimum of 5 feet in diameter. The outer edge of the standpipe must be sealed in order to eliminate water loss from around the base.
- Presaturate the excavation, via the standpipe, for at least one week prior to performing testing. Maintain a constant head of at least 18 inches of water in the standpipe at all times during the presoak period.

Testing:

- Perform percolation testing using sediment-laden water. A minimum sediment load of 1000 Nephelometric Turbidity Units (NTU) is required. Sediment loading must be carried out by directly adding sediment to the standpipe based upon water usage and the amount of load required to produce the required NTU. This must be accomplished on a daily basis. The sediment shall be collected from a nearby source area and shall be screened to reflect the anticipated sediment load grain size distribution. Maintain a constant 18 inches of head in the standpipe and record usage utilizing a continuous data logger.
- Once the usage stabilizes, continue testing for a minimum of two weeks. Stabilization is defined as when the slope of the mean trend line of the readings is less than 2 percent, when graphing the time (days) vs. percolation rate (in/hr).

Retesting:

- Allow sediment water to percolate completely and perform the recommended annual maintenance procedures recommended by the Soils Engineer and in accordance with Attachment 3 on the test area.
- Perform a retest utilizing the same methodology as described in the testing above, once maintenance has been performed.

Post-Testing:

- Based on the results of testing, the consultant must recommend a long-term percolation rate (in inches per day) to be utilized in the design of the percolation basin. The recommendation shall not exceed the result of the retest utilizing maintenance.
- Prepare and submit a report, which discusses the testing procedures, includes conclusions, and provides recommendations for maintenance.

Additional Notes:

- Land Development Division must be notified at least three (3) working days prior to initiation of testing.
- Basins will not be approved in areas that will receive fill during grading operations.
- Land Development Division will be responsible for requesting testing of proposed percolation basins and acceptance of the recommended percolation rate.
- Geotechnical and Materials Engineering Division will be responsible for the review of the testing procedures and design parameters.
- Flood Maintenance Division will be responsible for the operation and maintenance of the basin upon transfer to the Flood Control District.
- Percolation basins must percolate completely within seven days.