

CITY OF INGLEWOOD



SPECIFICATIONS FOR

"INGLEWOOD NEW WELL NO. 7 SITE IMPROVEMENTS AND


PIPELINE PROJECT"

BID NO. CB-17-07

Public Works Department One West Manchester Boulevard Inglewood, California 90301 (310) 412-5333

Bid Proposal Due on <u>Wednesday, May 17, 2017 no later than</u> <u>11:00 AM</u> at City Clerk Office.

MARCH 2017

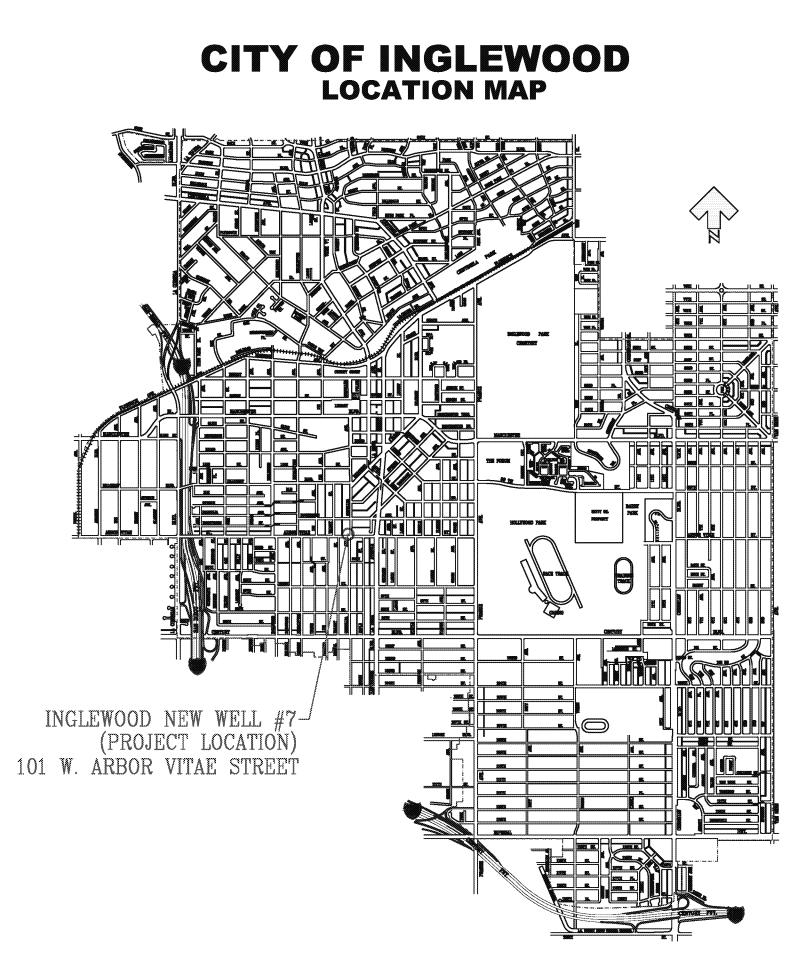

BIDDER'S PROPOSAL AND STATEMENT CITY OF INGLEWOOD, LOS ANGELES COUNTY, CALIFORNIA "INGLEWOOD NEW WELL NO. 7 SITE IMPROVEMENTS AND PIPELINE PROJECT"

PROPOSAL

To the City of Inglewood One Manchester Boulevard Inglewood, CA 90301

The undersigned declares that he/she has carefully examined the location of the proposed work and has otherwise satisfied himself/herself as to the nature and location of the work, and is fully informed as to all conditions and matters which can in any way affect the work or cost thereof, that he/she has examined the Specifications and Plans, and has read the accompanying "**INSTRUCTIONS TO BIDDERS**" and hereby agrees to provide the following:

To furnish all labor, materials, equipment, transportation, and services and to do all the work required for the **"INGLEWOOD NEW WELL NO. 7 SITE IMPROVEMENTS AND PIPELINE PROJECT"** and in strict conformity with the plans and specifications and at the following lump sum prices, to Wit (please see "Measurement and Payment" Section for details):

ltem No.	Bid Item Description	Quan tity	Unit	Unit Price	Amount
NEW V	VELL NO. 7 SITE IMPROVEMENTS AND P	IPELINE			
101	Mobilization and Demobilization (including two 6-feet x 6-feet construction billboards).	1	Lump Sum		
102	Trees removal and trimming.	1	Lump Sum		
103	Demolition, removal, & clearing the site and site preparation.	1	Lump Sum		
104	Implementation of BMPs, including preparation and implementation of Storm Water Pollution Prevention Program and SCAQMD Rule 403 in accordance with the latest State regulations.	1	Lump Sum		
105	Traffic Control & Devices and Safety Measures.	1	Lump Sum		
106	Furnish and Install 12-inch R.C.P. Wastewater Drainage Line, including 12- inch R.C. pipes, 48-inch ID Manhole, Connection to existing 36-inch Storm Drain, Air-Gap Basin Concrete Drain Inlet	500	Linear Feet		

	non Drowing #0 E00 Datail 4 with]		
	per Drawing #C-502 Detail 1 with galvanized steel grate & frame, potholing, excavation, backfill & compaction and new A.C. pavement for the excavated street.			
107	Furnish and Install 8-inch PVC pipe including curb inlet catch basin per SPPWC Plan#300-3 (7-feet W x 3-feet V), excavation, backfill & compaction.	85	Linear Feet	
108	Furnish and Install 12-inch DIP Water Discharge Line, including 12-inch steel pipes, various fittings, pipe supports, 12- inch swing check valve, 12-inch butterfly valve, combination air vacuum release valves, pressure switches & gauges, magnetic flow meter, connection to existing 27-inch RCCP transmission line, sample tap connections, potholing, excavation, backfill & compaction, and new pavement per Inglewood Well No. 7 Construction Drawing #M-101.	100	Linear Feet	
109	Furnish and Install Above Ground 10-inch wastewater line, including but not limited to 10-inch DIP steel pipe and fittings, reducers, pipe supports, v-cone water meter, 8-inch butterfly valve, 8-inch control valve, and orifice plate per Inglewood Well No. 7 Construction Drawing #M-101.	1	Lump Sum	
110	Furnish and Install 5-inch RC Concrete Pavement with #4 rebars @ 12" spacing each way on 6" Crushed Aggregate Base (C.A.B.) compacted to 95% Compaction.	4,700	Square Feet	
111	Furnish and Install 6-inch Gravel (Crushed Rock) Pavement over compacted native soil (Minimum 90% Compaction).	2,100	Square Feet	
112	Furnish and Install 6-inch Fire Hydrant Assembly (wet-barrel with 6-inch break- off spool) with New 6-inch Line Per Inglewood Water Standard W-355 Sheet 10 (include excavation, backfill, compaction, new pavement, and connection using 6-inch DIP pipe, 6-inch valve, 12-inch x12-inch x6-inch Tee, Thrust Block, and 2 pieces of 10-feet DIP pipe with M.J. kits connecting to existing water main) plus obtaining fire hydrant	1	Lump Sum	

				\$			
	TOTAL BID WRITTEN IN WORDS			TOTAL BID IN FIGURES			
116	Miscellaneous, incidentals & all other Works such as As-Built drawings, Final Report, as indicated on the contract documents but not included in the above bid items.	1	Lump Sum				
115	Site Works, including but not limited to Site Grading; and Construct Commercial Driveway (11-feet extension), Sidewalk, 6-inch Curb and Gutter per Inglewood & APWA Standard Plans.	1	Lump Sum				
114	Furnish and Install Bollards with its concrete foundations per Drawing Sheet C-502.	7	Each				
113	Furnish and Install 10-feet high tubular steel fence, including remote-controlled 10-feet high sliding gate and railing, other equipments & foundations/footings per Drawing Sheet C-501.	190	Linear Feet				
	meter and \$1,000 deposit for water consumption.						

IN CASE OF DISCREPANCY BETWEEN THE WORDS AND FIGURES, THE WORDS SHALL PREVAIL.

RECEIPT OF ADDENDUM NO. ____, ____, ____, IS HEREBY ACKNOWLEDGED.

This bid is based upon completing the work within two hundred seventy **(270)** working days* from the date of the Notice to Proceed. Before signing the contract, the lowest responsible bidder shall furnish all necessary bonds within ten (10) days after receiving the Contract notification.

Lowest monetary bidder will be determined by the total lump sum bid amount indicated above. The City, however, reserves the right to add or subtract quantities or work based on the unit prices/unit lump sums so indicated as its budgetary needs may require. Notwithstanding Section 3, paragraph 3-2.1 of the Standard Specification for Public Works Construction, the City may change the Plans, Specifications, character of the work, or quantity of work provided even when the total arithmetic dollar value of such changes, both additive and deductive, are in excess of twenty-five percent (25%) of the Total Contract price. No adjustment for the Unit Prices/Unit Lump Sum will be made for the adjusted quantities or work.

Per California Public Contract Code 6109, The City of Inglewood cannot permit a contractor or subcontractor who is ineligible to bid or work on, or be awarded, a public