


**MOD - model: WS-W65607**  
dweLED™ Outdoor Sconce

**WAC LIGHTING**  
Responsible Lighting®



Fixture Type:

Catalog Number:

Project:

Location:

**PRODUCT DESCRIPTION**

Expertly crafted from die cast aluminum, the Mod family features a smooth curved modern shape. ADA compliant and Dark Sky friendly. Ideal for exterior residential, hospitality and commercial applications.

**FEATURES**

- Diecast aluminum construction
- Dark Sky friendly
- Luminaire may be rotated 180° when mounting
- ETL & cETL wet location listed, IP65
- ADA compliant, low profile design
- 100%-10% electronic low voltage (ELV) dimming
- Driver located inside the fixture
- Universal driver (120V-220V-277V)
- CR190
- Color Temp: 3000K
- Rated Life: 70,000
- 5 year warranty

**SPECIFICATIONS**

**Construction:** Diecast aluminum construction  
**Light Source:** LED  
**Dimming:** 100%-10% Electronic Low Voltage (ELV)  
**Standards:** ETL & cETL wet location listed, IP65, ADA compliant, Dark Sky Friendly

| Lamp                      | Beam Up  | Beam Down  | LED Color  | Finish Color                 |
|---------------------------|--|--|--|------------------------------|
| 2x10w LED<br>2x10w Lumens | T2 - Type 4 - 2700K<br>T2 - Type 8 - 2700K<br>T3 - Type 4 - 2700K<br>T3 - Type 8 - 2700K<br>T4 - Type 4 - 2700K<br>T4 - Type 8 - 2700K | T2 - Type 4 - 2700K<br>T2 - Type 8 - 2700K<br>T3 - Type 4 - 2700K<br>T3 - Type 8 - 2700K<br>T4 - Type 4 - 2700K<br>T4 - Type 8 - 2700K | W27-2700K<br>W30-3000K<br>W35-3500K<br>W40-4000K | BR - Bronze<br>GH - Graphite |

Example: WS - W65607 - BR

wacighting.com Phone: (800) 526-2588 Fax: (800) 526-2585

Headquarters/Eastern Distribution Center 44 Harbor Park Drive Port Washington, NY 11050


Central Distribution Center 1600 Distribution Ct Lithia Springs, GA 30122

Western Distribution Center 1750 Archibald Avenue Ontario, CA 91760


HOLLYWOOD PARK RESIDENTIAL | LOS ANGELES, CA | 12 MAR 2018 | LIGHTING CATALOG PAGE

LIGHTING DESIGN ALLIANCE, INC. TYPE WS3 19 of 24

**UTA-31891**  
Tango 32 Up/Down Light



**Physical Data**  
Length - 7.3"  
Height - 11.4"  
Weight - 18.5 lbs  
IP65 - Suitable For Wet Locations  
IK08 - Impact Resistant (Vandal Resistant)



| Lamp                      | Beam Up  | Beam Down  | LED Color  | Finish Color                 |
|---------------------------|--|--|--|------------------------------|
| 2x10w LED<br>2x10w Lumens | T2 - Type 4 - 2700K<br>T2 - Type 8 - 2700K<br>T3 - Type 4 - 2700K<br>T3 - Type 8 - 2700K<br>T4 - Type 4 - 2700K<br>T4 - Type 8 - 2700K | T2 - Type 4 - 2700K<br>T2 - Type 8 - 2700K<br>T3 - Type 4 - 2700K<br>T3 - Type 8 - 2700K<br>T4 - Type 4 - 2700K<br>T4 - Type 8 - 2700K | W27-2700K<br>W30-3000K<br>W35-3500K<br>W40-4000K | BR - Bronze<br>GH - Graphite |

Ordering Example: UTA - 31891 - 2x32W - T2 - W30 - 02 - 120/277V - Options

PROJECT: \_\_\_\_\_ DATE: \_\_\_\_\_ QUANTITY: \_\_\_\_\_

TYPE: \_\_\_\_\_ NOTE: \_\_\_\_\_

HOLLYWOOD PARK RESIDENTIAL | LOS ANGELES, CA | 12 MAR 2018 | LIGHTING CATALOG PAGE

LIGHTING DESIGN ALLIANCE, INC. TYPE WS4 20 of 24

**BOCA FLASHER**  
LED Lighting Systems, Technologies & Manufacturing

**HPNLS-HO**  
Specification Sheet

DATE: \_\_\_\_\_ TYPE: \_\_\_\_\_ PROJECT: \_\_\_\_\_ CUSTOMER: \_\_\_\_\_

**Line Voltage Linear LED Strip Fixture**

Dimmable solid color line voltage fixture fabricated with a variety of options. The Boca HPNLS-HO is a high-output fixture well suited for many lighting situations where output is of concern. This line voltage version eliminates the need for secondary transformers, making installation contractor friendly. Boca's CleanDim™ technology ensures even dimming from 0-100%. The HPNLS can be fabricated with a range of optics and color temperature choices, affording a multitude of distribution and effect options. The housing is anodized aluminum with a durable finish making it weather and abrasion resistant. It is UL Listed for dry, damp or wet location (model dependent).

**KEY FEATURES:**

- Compact, variable light fixture for dry, damp or wet location use
- Fixture comes in 6" increments (12" minimum)
- Many options in optics, color temperature and accessories.
- Multiple different types of lenses.
- Uses standard low voltage dimmers.
- Fixtures are compatible with both forward and reverse phase dimming 0-10V, DMX dimmable.
- Clear anodized aluminum or black finish standard.
- Contact Boca Flasher for tips with custom installations.
- Total linear feet per power feed: 40ft @ 120V.

**LENS OPTIONS:**

**Key Features:**

- Interior or exterior use.
- Lens is 1/8" (1.99 mm), adds 1/16" to overall height of fixture.
- Call factory for more information.
- 87% transmission.
- To specify add "0" in lens box.

**Key Features:**

- Interior use only.
- Best for direct view use.
- Lens is 1/4" (2.54 mm), adds 1/8" to overall height of fixture.
- Call factory for more information.
- 42% transmission.

**TECHNICAL SPECIFICATIONS:**

| INPUT VOLTAGE: | 16 watts per linear ft. | 90-130V 210-277V | CONTROL: | Leading edge/trailing edge line driver 0-10V | POWER CABLE: | UL standard #16 | LENS SCREWS: | 1" on center | LENS: | 12" x 6" in 6" increments. | TOTAL WEIGHT: | 1.60 | TOTAL HEIGHT: | Not including 1.17" |
|----------------|-------------------------|------------------|----------|--|--------------|-----------------|--------------|--------------|-------|----------------------------|---------------|------|---------------|---------------------|
|----------------|-------------------------|------------------|----------|--|--------------|-----------------|--------------|--------------|-------|----------------------------|---------------|------|---------------|---------------------|

We are constantly improving our fixtures and reserve the right to change options and specifications. For specific requirements, contact your Boca Flasher sales representative. This product complies with UL 1994 listing procedures and delivers excellent, Sustainable Lighting System results or exceeds Title 24 Compliance. \*40 Lumens per Watt. For additional information and details visit our website at [www.bocafasher.com](http://www.bocafasher.com). All products proudly manufactured in the USA. Boca Flasher, Inc. 509 South Wilshire Blvd, Oceanside, CA 92054. Phone: 949-460-0100. Fax: 949-460-0101. © 2017 Boca Flasher, Inc. All rights reserved. All names and trademarks are property of their respective owners. REV 06-2017

HOLLYWOOD PARK RESIDENTIAL | LOS ANGELES, CA | 12 MAR 2018 | LIGHTING CATALOG PAGE

LIGHTING DESIGN ALLIANCE, INC. TYPE WS5 21 of 24

**BOCA FLASHER**  
LED Lighting Systems, Technologies & Manufacturing

**HPNLS-HO**  
ADDITIONAL OPTIONS

DATE: \_\_\_\_\_ TYPE: \_\_\_\_\_ PROJECT: \_\_\_\_\_ CUSTOMER: \_\_\_\_\_


**BAFFLE**

**Hexcell Louver**

- Economical solution to off axis glare issues.
- Louvers located flush to secondary optic, preventing unwanted refraction.
- Louver cannot be utilized when no optic (120°) is specified.
- Louvers installed to ensure no damage is done during installation or after. This also ensures no dirt build-up.
- Louver ships pre-fitted making on site fixture installation easy.

**Baffle Square Design**

- Design cuts off light at 90°
- Baffles are lightweight black PVC with non-reflective surfaces to avoid glare from interior sections.
- One piece baffle slides onto the extruded housing making installation easy.
- SR only adds .75" to overall height
- SR adds .50" to overall height
- SR adds 1.625" to overall height
- To specify add "SR" or "SRB" for slanted version or "SRB" for flicker version in options box.

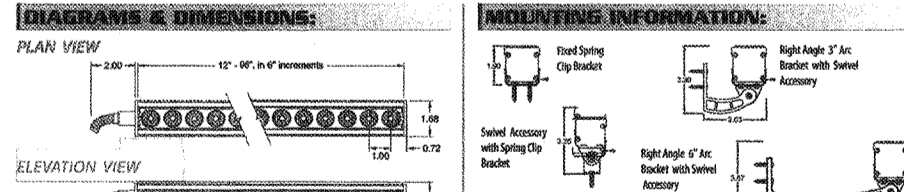

**LUMINAIRE INFORMATION:**

**FIXTURE TYPE:** 3000K, 10° optic, 120V, 48"

**Center Beam Candle Power & Illumination Information**


| Distance | Foot Candles |
|----------|--------------|
| 2ft      | 4200.0       |
| 3ft      | 1800.0       |
| 4ft      | 1012.5       |
| 5ft      | 675.0        |
| 6ft      | 472.5        |
| 7ft      | 320.7        |
| 8ft      | 227.8        |
| 9ft      | 164.4        |
| 10ft     | 121.5        |
| 12ft     | 71.8         |

We are constantly improving our fixtures and reserve the right to change options and specifications. For specific requirements, contact your Boca Flasher sales representative. This product complies with UL 1994 listing procedures and delivers excellent, Sustainable Lighting System results or exceeds Title 24 Compliance. \*40 Lumens per Watt. For additional information and details visit our website at [www.bocafasher.com](http://www.bocafasher.com). All products proudly manufactured in the USA. Boca Flasher, Inc. 509 South Wilshire Blvd, Oceanside, CA 92054. Phone: 949-460-0100. Fax: 949-460-0101. © 2017 Boca Flasher, Inc. All rights reserved. All names and trademarks are property of their respective owners. REV 06-2017


HOLLYWOOD PARK RESIDENTIAL | LOS ANGELES, CA | 12 MAR 2018 | LIGHTING CATALOG PAGE

LIGHTING DESIGN ALLIANCE, INC. TYPE WS5 22 of 24

**UMV-30031**  
Marvik 4 Up/Downlight 3" Dia



**Physical Data**  
Diameter - 3"  
Length - 3.1"  
Height - 2.8"  
Weight - 3.7 lbs  
IP65 - Suitable For Wet Locations  
IK08 - Impact Resistant (Vandal Resistant)



| Lamp                      | Beam Up & Down  | LED Color  | Finish Color                 |
|---------------------------|---|--|------------------------------|
| 2x10w LED<br>2x10w Lumens | M - Narrow 25°<br>M - Medium 35°<br>W - Wide 37°<br>W - Very Wide 37° | W27-2700K<br>W30-3000K<br>W35-3500K<br>W40-4000K | BR - Bronze<br>GH - Graphite |

Ordering Example: UMV - 30031 - 2x10w - M - W30 - 02 - 120/277V - Options

PROJECT: \_\_\_\_\_ DATE: \_\_\_\_\_ QUANTITY: \_\_\_\_\_

TYPE: \_\_\_\_\_ NOTE: \_\_\_\_\_

HOLLYWOOD PARK RESIDENTIAL | LOS ANGELES, CA | 12 MAR 2018 | LIGHTING CATALOG PAGE

LIGHTING DESIGN ALLIANCE, INC. TYPE WS6 23 of 24

**MOD - model: WS-W65607**  
dweLED™ Outdoor Sconce


**WAC LIGHTING**  
Responsible Lighting®

Fixture Type:

Catalog Number:

Project:

Location:

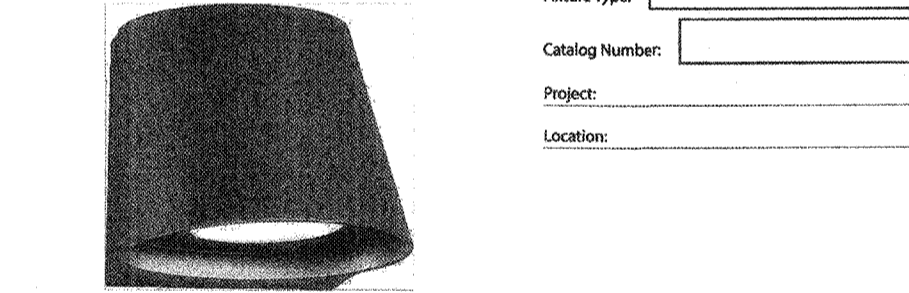

Expertly crafted from die cast aluminum, the Mod family features a smooth curved modern shape. ADA compliant and Dark Sky friendly. Ideal for exterior residential, hospitality and commercial applications.

**FEATURES**

- Diecast aluminum construction
- Dark Sky friendly
- Luminaire may be rotated 180° when mounting
- ETL & cETL wet location listed, IP65
- ADA compliant, low profile design
- 100%-10% electronic low voltage (ELV) dimming
- Driver located inside the fixture
- Universal driver (120V-220V-277V)
- CR190
- Color Temp: 3000K
- Rated Life: 70,000
- 5 year warranty

**SPECIFICATIONS**

**Construction:** Diecast aluminum construction  
**Light Source:** LED  
**Dimming:** 100%-10% Electronic Low Voltage (ELV)  
**Standards:** ETL & cETL wet location listed, IP65, ADA compliant, Dark Sky Friendly

| Lamp                      | Beam Up  | Beam Down  | LED Color  | Finish Color                 |
|---------------------------|--|--|--|------------------------------|
| 2x10w LED<br>2x10w Lumens | T2 - Type 4 - 2700K<br>T2 - Type 8 - 2700K<br>T3 - Type 4 - 2700K<br>T3 - Type 8 - 2700K<br>T4 - Type 4 - 2700K<br>T4 - Type 8 - 2700K | T2 - Type 4 - 2700K<br>T2 - Type 8 - 2700K<br>T3 - Type 4 - 2700K<br>T3 - Type 8 - 2700K<br>T4 - Type 4 - 2700K<br>T4 - Type 8 - 2700K | W27-2700K<br>W30-3000K<br>W35-3500K<br>W40-4000K | BR - Bronze<br>GH - Graphite |

Example: WS - W65607 - BR

wacighting.com Phone: (800) 526-2588 Fax: (800) 526-2585

Headquarters/Eastern Distribution Center 44 Harbor Park Drive Port Washington, NY 11050

Central Distribution Center 1600 Distribution Ct Lithia Springs, GA 30122

Western Distribution Center 1750 Archibald Avenue Ontario, CA 91760

HOLLYWOOD PARK RESIDENTIAL | LOS ANGELES, CA | 12 MAR 2018 | LIGHTING CATALOG PAGE

LIGHTING DESIGN ALLIANCE, INC. TYPE WS7 24 of 24